

# Delock 5G LTE Antenna SMA plug -0.5 - 2.3 dBi omnidirectional with tilt joint black

### Description

This 5G LTE antenna by Delock allows the usage of different **5G LTE** bands inside. It is completely compatible to GSM, UMTS, 5G LTE, ZigBee, Z-Wave, NB-IoT, WLAN 2.4 GHz, Bluetooth, ISM, DECT and LoRa.

#### 5G mobile radio standard

5G unlike its predecessors LTE (4G) and UMTS (3G) will use more and wider frequency spectrums.

The 5G standard promises more throughput, capacity and low latency.



### **Technical details**

- Connector: 1 x SMA plug
- GSM, UMTS, 5G LTE, ZigBee, Z-Wave, NB-IoT, WLAN, Bluetooth, ISM, DECT, LoRa
- Frequency range:
  - 617 798 MHz
  - 803 960 MHz
  - 1452 1496 MHz
  - 1710 2270 MHz
  - 2300 2690 MHz
  - 3300 3800 MHz
  - 4200 5000 MHz
- Antenna gain: -0.53 2.3 dBi
- Impedance: 50 Ohm
- VSWR: 4.0 3.0
- Polarisation: linear, vertical
- Operating temperature: -10 °C ~ 55 °C
- Housing material: ABS
- Colour: black
- Dimensions (LxWxH): ca. 197.00 x 28.00 x 13.50 mm

### **DATASHEET**




### System requirements

• Device with a free SMA connector

## Package content

• Antenna

### Images

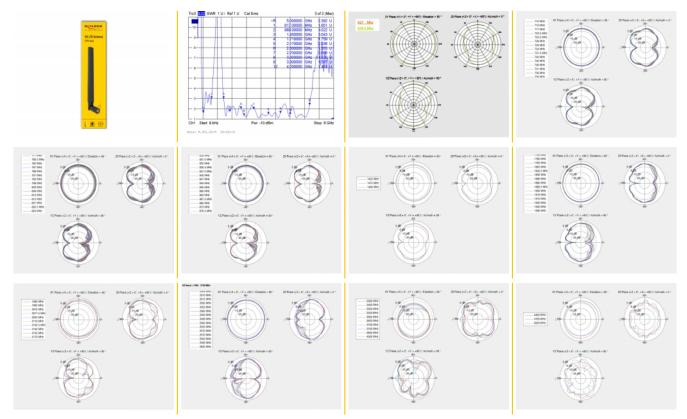

### **DATASHEET**



### General

Mounting type:	Screw mounting	
Suitable for indoor:	yes	
Interface		
connector:	1 x SMA plug	
Technical characteristics		
Frequency range:	617 - 798 MHz 803 - 960 MHz 1452 - 1496 MHz 1710 - 2270 MHz 2300 - 2690 MHz 3300 - 3800 MHz 4200 - 5000 MHz	
Antenna gain:	-0.53 - 2,3 dBi	
Impedance:	50 Ω	
Operating temperature:	-10 °C ~ 55 °C	
Polarisation:	linear vertical	

### **Physical characteristics**

VSWR:

Housing colour:	black
Housing material:	ABS
Width:	2.8 cm
Height:	1.6 cm
Length with tilt joint:	19.7 cm

3.0 - 4.0