

Delock LTE MIMO GNSS Antenna 3 x SMA plug RG-174 3 m screw mounting outdoor black

Description

This antenna by Delock allows the usage of different LTE and GNSS bands indoors and outdoors. It is completely compatible to GSM, UMTS, LTE, ZigBee, DECT, Z-Wave, NB-IoT, GNSS, Bluetooth, ISM, MIMO and LoRa 868 MHz / 915 MHz.



Item no. 12700

EAN: 4043619127009 Country of origin: China

Package: Box

Technical details

Connectors: 3 x SMA plug

• 2 x LTE:

Frequency range: 698 MHz - 960 MHz 1710 MHz - 2690 MHz

Impedance: 50 Ohm

VSWR: 3.0

Antenna gain: 2.0 - 2.5 dBi

Polarisation: linear

• GNSS:

Frequency range:

GALILEO: E1, 1575.4200 MHz GPS: L1, 1575.4200 MHz

Antenna gain: 2 dBi

VSWR: 1.5

Impedance: 50 Ohm Polarisation: RHCP

• LNA GNSS:

Frequency range:

GALILEO: E1, 1575.4200 MHz GPS: L1, 1575.4200 MHz

DATASHEET



Antenna gain: 28 dBi

Operating voltage: 2.2 - 5.0 V Current consumption: 5 - 15 mA

VSWR: 2.0

Impedance: 50 Ohm

• Mounting type: screw mounting

• Operating temperature: -40 °C ~ 85 °C

Housing material: ABSProtection class: IP67

• Colour: black

Cable type: coaxialCable type: RG-174Cable colour: black

• Cable diameter: ca. 2.7 mm

• Cable attenuation: 1.5 dB @ 1.5 GHz per meter

Smallest bending radius: 10.5 mm
Cable length incl. connector: ca. 3 m
Dimensions (Ø x H): ca. 81.3 x 16.3 mm

System requirements


• Device with multiple free SMA ports

Package content

Antenna



Images

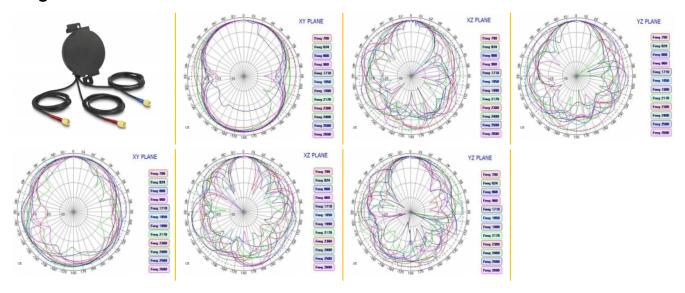





General

Mounting type:	Screw mounting
Protection category:	IP67
Suitable for outdoor:	yes

Interface

Connector 1:	2 x SMA male for LTE
Connector 2:	1 x SMA plug GNSS

Technical characteristics

Frequency range:	698 MHz - 960 MHz GPS: L1, 1,5754200 GHz 1710 MHz - 2690 MHz GALILEO: E1. 1.5754200 GHz
Antenna gain:	LTE MIMO: 2.5 dBi GNSS: 28 dB
Impedance:	50 Ω
Operating temperature:	-40 °C ~ 85 °C
Polarisation:	linear
VSWR:	2.0

Physical characteristics

Housing material:	ABS
Cable category:	coaxial
Cable type:	RG-174
Cable attenuation:	1.5 dB @ 1.5 GHz per meter
Cable colour:	black
Cable length incl. connector:	3 m
Diameter:	83.3 mm





Height:	16.3 mm
Smallest bending radius:	10.5 mm
Colour:	black
Thread type:	M12