


Delock 2.5" Converter SATA 22 pin > 2 x M.2 with RAID 7 mm

Description

This Delock converter enables the connection of up to two M.2 SSD in 2280, 2260, 2242 or 2230 format which can be used as a 2.5" HDD. The converter can be installed into your system internally through an SATA 22 pin interface. When using more than one SSD, you have the possibility to use different RAID level.

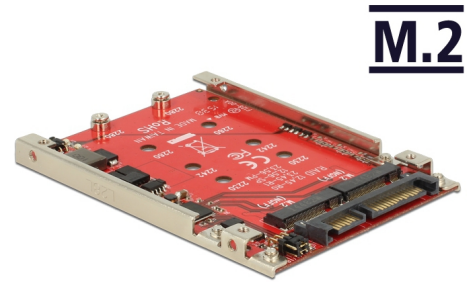

Note

The SMART function is not supported. JBOD is only supported on SATA controllers with port multiplier function.

Item no. 62698

EAN: 4043619626984

Country of origin: Taiwan,
Republic of China

Package: Box

Technical details

- Connectors:
 - 1 x SATA 6 Gb/s 22 pin receptacle
 - 2 x 67 pin M.2 key B slot
- Interface: SATA
- Chipset: JMS562
- Form factor: 2.5"
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Data transfer rate up to 6 Gb/s
- Supports RAID 0, 1, JBOD
- RAID mode set by jumper on board
- 3 x LED indicator
- Bootable
- OS independent, no driver installation necessary

System requirements

- A free SATA 22 pin interface

Package content

- Converter
- 4 x screw
- User manual

Images



General

| | |
|---|---|
| Form factor: | 2.5" |
| Supported operating system: | OS independent, no driver installation necessary |
| LED indicator: | 3 x |
| Slot: | SATA |
| Supported module: | M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA |
| Maximum height of the components on the module: | 1.5 mm application of double-sided assembled modules supported |

Interface

| | |
|--------------|-----------------------------------|
| Connector 1: | 1 x SATA 6 Gb/s 22 pin receptacle |
| Connector 2: | 2 x 67 pin M.2 NGFF key B slot |

Technical characteristics

| | |
|---------------------|----------------|
| Chipset: | JMS562 |
| Data transfer rate: | 6 Gb/s |
| RAID function: | JBOD 0 1 |