


# Delock 2.5" Converter SATA 22 pin > M.2 with Enclosure

## Description

This Delock converter enables the connection of a M.2 SSD in 2280, 2260, 2242 and 2230 format. It can be used as a replacement for a 2.5" HDD. The converter will be installed into the system internally through a SATA 22 pin interface.

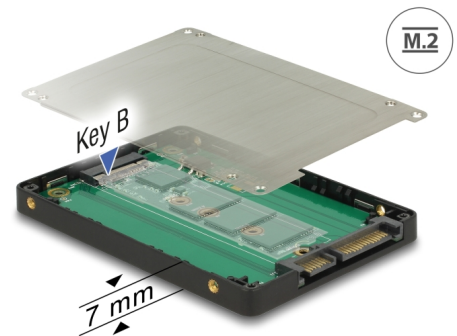

**Item no. 62792**

EAN: 4043619627929

Country of origin: Taiwan,  
Republic of China

Package: Retail Box

## Technical details

- Connectors:
  - 1 x SATA 6 Gb/s 22 pin plug >
  - 1 x 67 pin M.2 key B slot
- Interface: SATA
- Form factor: 2.5"
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.25 mm  
application of double-sided assembled modules supported
- Data transfer rate up to 6 Gb/s
- Bootable
- Operating temperature: 0 °C ~ 70 °C
- Storage temperature: -40 °C ~ 85 °C
- Dimensions (LxWxH): ca. 100 x 70 x 8 mm

## System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux Kernel 3.16.0
- A free SATA 22 pin interface


---

## Package content

- Converter
- 1 x fixing screw
- Screwdriver
- User manual

---

## Images

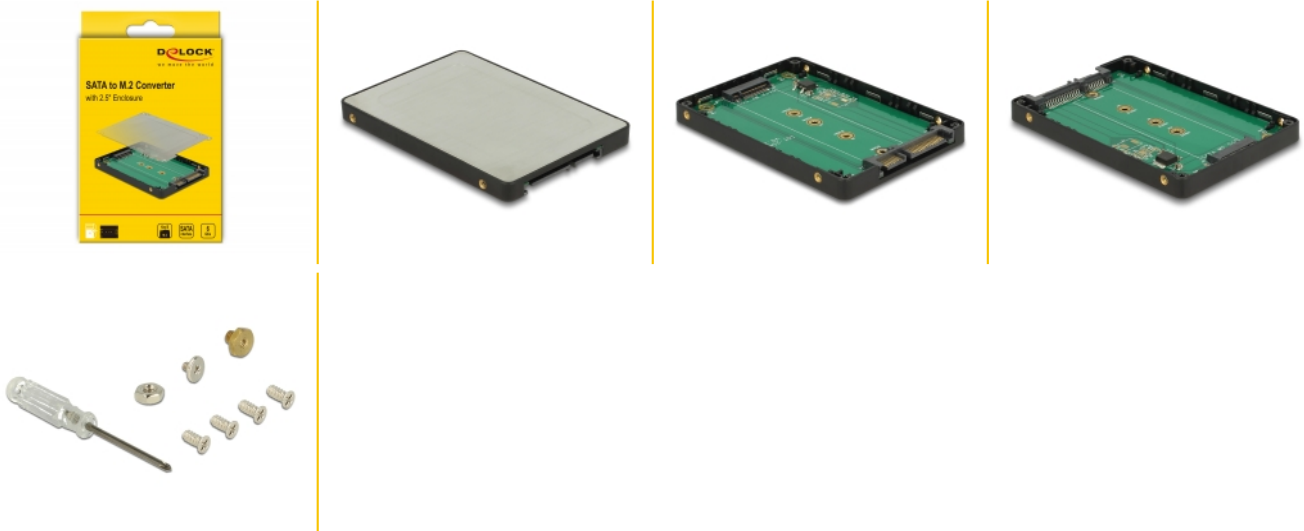

## General

Form factor:	2.5"
Function:	bootable
Supported operating system:	Linux Kernel 3.16 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
Slot:	SATA
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Maximum height of the components on the module:	1.25 mm application of double-sided assembled modules supported

## Interface

Connector 1:	1 x SATA 6 Gb/s 22 pin plug
Connector 2:	1 x 67 pin M.2 key B slot

## Technical characteristics

Data transfer rate:	6 Gb/s
---------------------	--------

## Physical characteristics

Length:	100 mm
Width:	70 mm
Height:	8 mm
Colour:	black silver