


Delock 2.5" Converter USB 3.1 Gen 2 USB Type-C™ female > M.2 + mSATA with Enclosure 9.5 mm

Description

This Delock converter enables the connection of an M.2 SSD in 2280, 2260, 2242 and 2230 format and an mSATA SSD in half size or full size format. Both SSDs can be used simultaneously. The converter can be installed into the system through the USB interface.

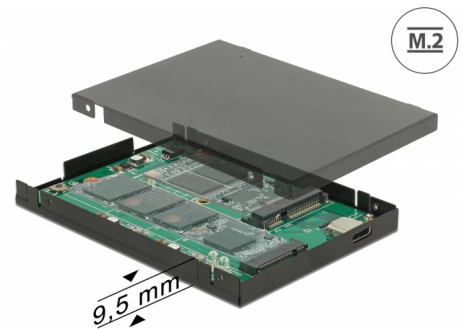

Item no. 62986

EAN: 4043619629862

Country of origin: Taiwan,
Republic of China

Package: Retail Box

Technical details

- Connectors:
 - 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female >
 - 1 x 67 pin M.2 key B slot
 - 1 x mSATA slot (half size / full size)
- Chipset: Asmedia ASM1352R
- Interface: SATA
- Form factor: 2.5"
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.35 mm, application of double-sided assembled modules supported
- LED indicator
- Maximum power for modules: 3 A
- Short circuit protection, over heating protection
- ESD protection up to 2 kV
- Dimensions (LxWxH): ca. 100.0 x 70.0 x 9.5 mm


System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 4.6
- A free USB interface

Package content

- Converter
- 2.5" enclosure
- Fixing screws for M.2 module, mSATA module and enclosure
- Cable USB-C™ male to USB Type-A male, length ca. 35 cm
- Cooling pad for M.2 and mSATA module
- User manual

Images



General

Form factor:	2.5"
Supported operating system:	Linux Kernel 4.6 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
Slot:	SATA
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Maximum height of the components on the module:	1.35 mm application of double-sided assembled modules supported
Protection:	Short circuit protection Overheating protection

Interface

Connector 1:	1 x USB 10 Gbps USB Type-C™ female
Connector 2:	1 x 67 pin M.2 key B slot
connector 3:	1 x mSATA slot (half size / full size)

Technical characteristics

Chipset:	Asmedia ASM1352R
----------	------------------

Physical characteristics

Length:	100 mm
Width:	70 mm
Height:	9.5 mm