


Delock SMA jack 90° PCB

Description

This jack by Delock is suitable for soldering on circuit boards. The gold coating prevents corrosion and ensures an optimal connection.

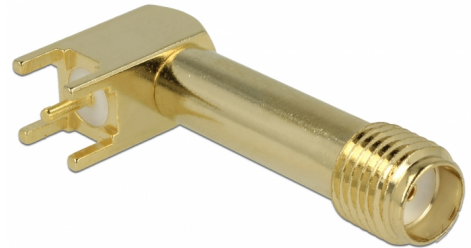

Item no. 65845

EAN: 4043619658459

Country of origin: China

Package: Zip poly bag

Technical details

- Connector: 1 x SMA jack 90°
- Pin: Brass gold plated
- Insulator: PTFE
- Housing: Brass gold plated
- Frequency range: 0 - 6 GHz
- Impedance: 50 Ohm
- VSWR: 1.5
- Thread type: 1/4" - 36 UNS - 2A
- Thread length: 5.5 mm
- Operating temperature: -55 °C ~165 °C
- Withstand Voltage: 500V / 50Hz
- Material: brass gold plated
- Soldering: 5 solder joint
- Grid: 2,54 mm
- Dimensions (LxHxD): 25.0 x 12.2 x 5.2 mm

System requirements

- Suitable board for mounting the SMA connector

Package content

- SMA Jack

Images



General

| | |
|----------------|-----------|
| Mounting type: | Soldering |
|----------------|-----------|

Interface

| | |
|------------|------------------|
| connector: | 1 x SMA Jack 90° |
|------------|------------------|

Technical characteristics

| | |
|------------------------|-----------------|
| Frequency range: | 0 - 6 GHz |
| Impedance: | 50 Ω |
| Operating temperature: | -55 °C ~ 165 °C |
| VSWR: | 1.5 |

Physical characteristics

| | |
|-------------------|--------------------|
| Solder pin: | Ø 0.95 mm |
| Housing material: | brass gold plated |
| Diameter: | 5.2 mm |
| Length: | 28.0 mm |
| Height: | 12.2 mm |
| Thread type: | 1/4" - 36 UNS - 2A |
| Insulator: | PTFE |