


Delock MMCX jack PCB

Description

This jack by Delock is suitable for soldering on circuit boards. The gold coating prevents corrosion and ensures an optimal connection.

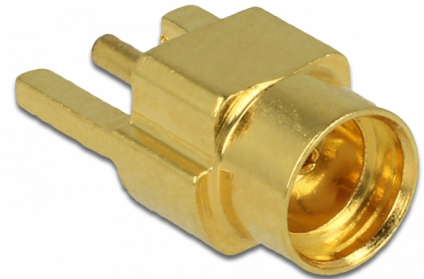

Item no. 65847

EAN: 4043619658473

Country of origin: China

Package: Zip poly bag

Technical details

- Connector: 1 x MMCX jack
- Pin: brass gold plated
- Insulator: PTFE
- Housing: brass gold plated
- Frequency range: 0 - 6 GHz
- Impedance: 50 Ohm
- VSWR: 1.2
- Operating temperature: -55 °C ~ 165 °C
- Soldering: 3 solder joint
- Dimensions (LxHxD): 7.5 x 4.5 x 3.4 mm

System requirements

- Suitable board for mounting the MMCX connector

Package content

- MMCX jack

Images



General

Mounting type:	Soldering
----------------	-----------

Interface

connector:	1 x MMCX jack
------------	---------------

Technical characteristics

Operating temperature:	-55 °C ~ 165 °C
VSWR:	1.2

Physical characteristics

Solder pin:	Ø 0.7 mm
Housing material:	brass gold plated
Diameter:	3.4 mm
Length:	7.5 mm
Height:	4.5 mm
Insulator:	PTFE