


Delock D-Sub 15 male with insulation displacement 2 pieces

Description

This D-Sub 15 male with insulation displacement by Delock can be used to mount flat cables with 15 pin and a pitch of 1.27 mm. The D-Sub connectors for flat cables are often used e.g. in industry, telecommunications and for hobby applications.

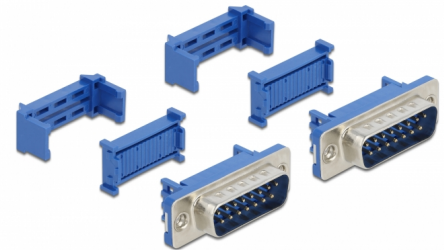

Note

For pressing the flat cable into the insulation displacement, it is recommended to use the Delock installation tool 86469.

Item no. 66592

EAN: 4043619665921

Country of origin: China

Package: Zip poly bag

Technical details

- Connectors:
 - 1 x D-Sub 15 male (2 rows) with nuts with insulation displacement
 - 1 x press-in clip
 - 1 x strain relief clip
- Suitable for flat cable with 1.27 mm pitch
- Operating temperature: -40 °C ~ 105 °C
- Colour: blue
- Dimensions (LxWxH): ca. 39.1 x 17.5 x 12.8 mm

System requirements

- A free D-Sub 15 pin female and flat cable 15 pin with 1.27 mm pitch

Package content

- 2 x D-Sub 15 male with insulation displacement

Interface

Connector 1:	1 x press-in clip 1 x Sub-D15 male (2 rows) with nuts with insulation displacement 1 x strain relief clip
--------------	---

Technical characteristics

Operating temperature:	-40 °C ~ 105 °C
------------------------	-----------------

Physical characteristics

Pitch distance:	1.27 mm
Length:	39.1 mm
Width:	17.5 mm
Height:	12.8 mm
Colour:	blue