


# Delock Cable SATA 6 Gb/s 7 pin receptacle + Floppy 4 pin power receptacle (5 V + 12 V) > SATA 22 pin receptacle upwards angled 30 cm

## Description

This cable by Delock enables the connection of a device with 22 pin SATA interface over a free SATA port and a free 4 pin Floppy power interface of the motherboard.

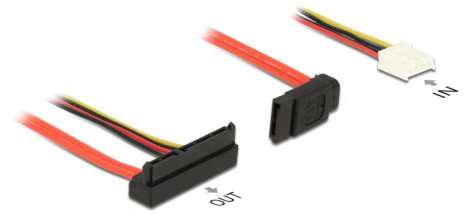

ca. 30 cm

**Item no. 84853**

EAN: 4043619848539

Country of origin: China

Package: Zip poly bag

## Technical details

- Connector:  
SATA 6 Gb/s 7 pin receptacle upwards angled + Floppy 4 pin power receptacle >  
SATA 6 Gb/s 22 pin (7 pin data + 15 pin power) receptacle upwards angled
- Compatible to motherboards of the Fujitsu D3003/3313 series and Gigabyte GA-H110TN Mini-ITX series
- Data transfer rate up to 6 Gb/s
- Downwards compatible to SATA 1.5 Gb/s and 3 Gb/s
- Version with 4 power wires (yellow = 12 V, black = GND, red = 5 V)
- Voltage: 5 V + 12 V
- Cable gauge:  
30 AWG data line  
22 AWG power line
- Length without connector: ca. 30 cm

## System requirements

- A free SATA interface
- A free Floppy power plug

---

## Package content

- SATA cable

---

## Images



## General

Specification:	SATA 6 Gb/s
----------------	-------------

## Interface

Connector 1:	1 x SATA 6 Gb/s 22 pin receptacle
Connector 2:	1 x Floppy 4 pin power receptacle 1 x SATA 6 Gb/s 7 pin receptacle

## Technical characteristics

Data transfer rate:	6 Gb/s
Voltage:	5 V 12 V

## Physical characteristics

Conductor gauge:	30 AWG data line 22 AWG power line
Length:	30 cm