


Delock Cable DisplayPort 1.2 male > High Speed HDMI-A male passive 4K 30 Hz 3 m black

Description

This cable by Delock enables the connection between devices, e.g. a monitor, with HDMI connector to a DisplayPort interface.

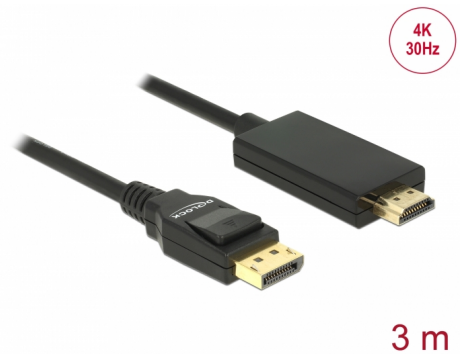

Item no. 85318

EAN: 4043619853182

Country of origin: China

Package: Retail Box

Technical details

- Connectors:
 - 1 x DisplayPort 20 pin male >
 - 1 x High Speed HDMI-A 19 pin male
- Chipset: Parade PS8402A
- DisplayPort 1.2a and High Speed HDMI specification
- Passive cable (level shifter), suitable only for graphics cards with DP++ output
- Signal direction: DisplayPort input > HDMI output
- Cable gauge: 30 AWG
- Cable diameter: ca. 6 mm
- Twisted-pair cabling
- Copper conductor
- Gold-plated connectors
- Triple shielded cable
- Transfer of audio and video signals
- Data transfer rate up to 10.2 Gb/s
- Resolution up to 3840 x 2160 @ 30 Hz
(depending on the system and the connected hardware)
- Colour: black
- Length incl. connectors: ca. 3 m

System requirements

- One free DisplayPort DP++ female

Package content

- DisplayPort to HDMI cable

Images



General

| | |
|----------------|-------------------------------------|
| Specification: | DisplayPort 1.2a High Speed HDMI |
|----------------|-------------------------------------|

Interface

| | |
|--------------|----------------------|
| Connector 1: | 1 x DisplayPort male |
| Connector 2: | 1 x HDMI-A male |

Technical characteristics

| | |
|----------------------------|---------------------|
| Chipset: | Parade PS8402A |
| Data transfer rate: | 10.2 Gb/s |
| Maximum screen resolution: | 3840 x 2160 @ 30 Hz |

Physical characteristics

| | |
|----------------------|-------------|
| Connector finishing: | gold-plated |
| Pin finishing: | gold-plated |
| Conductor material: | copper |
| Conductor gauge: | 30 AWG |
| Shielding: | triple |
| Length: | 3 m |
| Colour: | black |