

# Delock PoweredUSB cable male 12 V > DC 5.5 x 2.1 mm male 4 m for POS printers and terminals

## Description

This PoweredUSB cable by Delock can be used to supply power to a device with DC 5.5 x 2.1 mm female port via a PC or hub with PoweredUSB 12 V port.



**Item no. 85500**

EAN: 4043619855001

Country of origin: China

Package: Zip poly bag

## Technical details

- Connectors:
  - 1 x PoweredUSB male 12 V >
  - 1 x DC 5.5 x 2.1 mm male
- PoweredUSB specification
- Voltage: 12 V
- Cable gauge: 24 AWG
- Cable diameter: ca. 6 mm
- Cable double shielded
- Colour: black
- Length incl. connectors (L): ca. 4 m


## System requirements

- PC or hub with a free PoweredUSB 12 V female port

## Package content

- PoweredUSB cable

## Images

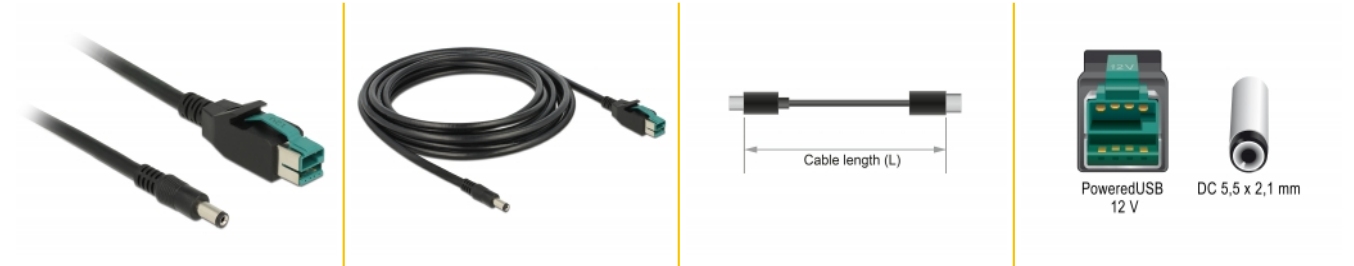

## General

|                |            |
|----------------|------------|
| Specification: | PoweredUSB |
|----------------|------------|

## Interface

|              |                          |
|--------------|--------------------------|
| Connector 1: | 1 x PoweredUSB male 12 V |
| Connector 2: | 1 x DC 5.5 x 2.1 mm male |

## Technical characteristics

|          |      |
|----------|------|
| Voltage: | 12 V |
|----------|------|

## Physical characteristics

|                  |                   |
|------------------|-------------------|
| Conductor gauge: | 24 AWG power line |
| Shielding:       | double            |
| Length:          | 4 m               |
| Colour:          | black             |