

# Delock Docking Station for MacBook with 5K

## Description

This docking station by Delock can be connected to a MacBook with two adjacent **Thunderbolt™ 3** ports, e.g. the MacBook Pro. One monitor can be operated at the HDMI output or Thunderbolt™ 3 port. One built-in **USB Type-C™** port and two USB Type-A ports allows the use of peripherals.

With a USB-C™ power supply, laptops such as the MacBook can be charged during operation.

Furthermore there are **two slots for memory cards** which can be used to read and write common memory cards.

### Docking station with Thunderbolt port

The **Thunderbolt™ 3** port can be used to connect e.g. a Thunderbolt™ monitor or further Thunderbolt™ 3 peripherals, which have their own power supply.

### USB Power Delivery (USB PD 3.0) support up to 100 watt

The docking station has a **USB Type-C™ Power Delivery port** to connect the power supply of the laptop or tablet to charge it. The docking station can also be **used without a power supply**.

### Small sturdy helper

Due to its **small dimensions** and its **sturdy housing**, this Delock docking station is particularly suitable for travelling. It can simply be packed into the bag together with the laptop and used as needed.

## Note

Only one additional external monitor can be connected to MacBook devices with M1, M2 and M3 chipset. MacBook devices with M1 Pro, M2 Pro, M3 Pro and M3 Max chipset can connect two or more additional external monitors. Further information is available at [www.apple.com](http://www.apple.com).



**Item no. 87740**

EAN: 4043619877409

Country of origin: China

Package: Retail Box

## Technical details

- Connectors:

- 2 x Thunderbolt™ 3 USB Type-C™ male
  - 1 x HDMI-A female
  - 2 x SuperSpeed USB (USB 3.2 Gen 1) Type-A female
  - 1 x SuperSpeed USB (USB 3.2 Gen 1) USB Type-C™ female
  - 1 x Thunderbolt™ 3 female (no power supply for connected Thunderbolt devices)
  - 1 x SD slot
  - 1 x Micro SD slot
  - Resolution:
    - Thunderbolt™ 3 up to 5120 x 2880 @ 30 Hz
    - HDMI up to 3840 x 2160 @ 30 Hz
    - (depending on the system and the connected hardware)
  - Transmission of audio and video signals
  - Only 1 monitor usable with the adapter
  - Input power: 1 x USB Type-C™ female max. 100 W
  - Metal housing
  - Colour: grey
  - Dimensions (LxWxH): ca. 118.0 x 28.0 x 9.5 mm
- 


## System requirements

- MacBook Pro with two adjacent Thunderbolt™ 3 ports
- 

## Package content

- Docking station
- User manual

## Images

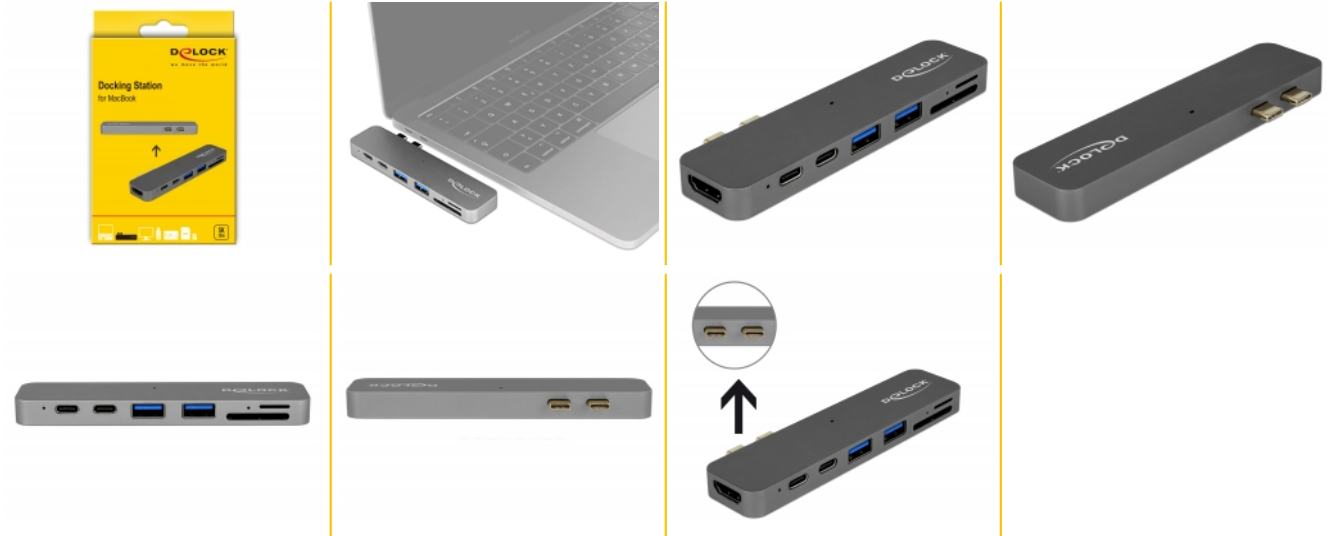

### Interface

Connector 1:	2 x Thunderbolt™ 3 USB Type-C™ male
Connector 2:	1 x HDMI-A female
connector 3:	2 x USB 5 Gbps Type-A female
connector 4:	1 x Thunderbolt™ 3 female (no power supply for connected Thunderbolt devices)

### Technical characteristics

Maximum screen resolution:	3840 x 2160 @ 30 Hz 5120 x 2880 @ 30 Hz
Voltage:	USB Power Delivery (PD) 2.0

### Physical characteristics

Housing material:	metal
Colour:	grey