


# Delock WLAN 802.11 ac/a/b/g/n Antenna RP-SMA plug 5 - 7 dBi directional with tilt joint black

## Description

This Wireless LAN antenna can be connected to a WLAN device with RP-SMA interface, in order to send and receive signals. Due to the directivity of this antenna the wireless supply is improved in rooms.

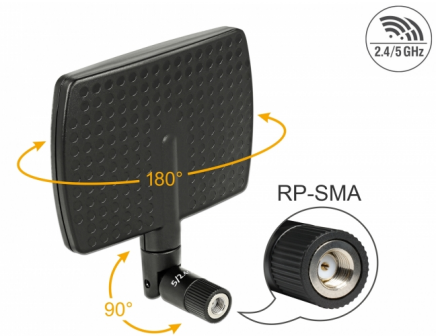

**Item no. 88447**

EAN: 4043619884476

Country of origin: Taiwan,  
Republic of China

Package: Retail Box

## Technical details

- Connector: RP-SMA plug
- Frequency range:  
2.400 - 2.500 GHz  
5.100 - 5.875 GHz
- Antenna gain:  
5 dBi @ 2.5 GHz  
7 dBi @ 5.7 GHz
- Impedance: 50 Ohm
- Polarisation: vertical
- VSWR: 2.0
- HBW horizontal beamwidth:  
70° @ 2.5 GHz  
50° @ 5.7 GHz
- VBW vertical beamwidth:  
70° @ 2.5 GHz  
60° @ 5.7 GHz
- Operating temperature: -10 °C ~ 55 °C
- Housing material: ABS UV resistant

- Colour: black
- Dimensions:  
ca. 90 x 120 x 13 mm (with tilt joint)  
ca. 90 x 95 x 13 mm (without tilt joint)
- Diameter:  
ca. 7.80 mm (top)  
ca. 12.90 mm (RP-SMA)






## System requirements

- Device with a free RP-SMA jack

## Package content

- WLAN antenna

## Images



### Interface

connector:	RP-SMA plug
------------	-------------

### Technical characteristics

Frequency range:	2.400 GHz - 2.500 GHz 5.100 - 5.875 GHz
Gain:	5 dBi @ 2.5 GHz 7 dBi @ 5.7 GHz
Impedance:	50 Ω
Operating temperature:	-10 °C ~ 55 °C
Polarisation:	vertical
VSWR:	2.0

### Physical characteristics

Housing material:	ABS UV resistant
Colour:	black