


Delock Antenna Cable N Plug > RP-SMA Plug CFD200 0.5 m Low Loss

Description

Use this antenna cable, to connect components of the radio frequency technology together. The RF cable is characterized by a low attenuation.

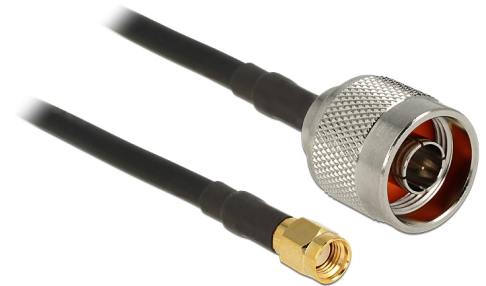

0,5 m

Item no. 88937

EAN: 4043619889372

Country of origin: Taiwan,
Republic of China

Package: Zip poly bag

Technical details

- Connectors:
 - 1 x N plug
 - 1 x RP-SMA plug
- Impedance: 50 Ohm
- Cable type: CFD200
- Cable category: coaxial
- Cable attenuation:
 - 0.55 dB @ 2.4 GHz per meter
 - 0.86 dB @ 5.7 GHz per meter
- Cable diameter: 5 mm
- Cable colour: black
- Minimum bending radius: 12.7 mm
- Cable length incl. connectors: ca. 0.5 m


System requirements

- Device with free N jack or RP-SMA jack

Package content

- Antenna extension cable

Images



Interface

Connector 1:	1 x N male
Connector 2:	1 x RP-SMA plug

Technical characteristics

Impedance:	50 Ω
------------	------

Physical characteristics

Cable category:	coaxial
Cable type:	CFD200
Cable attenuation:	0.55 dB @ 2.4 GHz per meter 0.86 dB @ 5.7 GHz per meter
Cable colour:	black
Cable length incl. connector:	0.5 m
Pin finishing:	gold-plated
Smallest bending radius:	12.7 mm