

# Delock LTE Antenna SMA plug 2 dBi fixed omnidirectional with connection cable (RG-316U, 3 m) outdoor black

## Description

This LTE antenna by Delock allows the usage of different LTE bands indoors and outdoors. It is completely compatible to GSM, UMTS, Bluetooth, WLAN 2.4 GHz, ZigBee, DECT, Z-Wave and LoRa 868 MHz / 915 MHz.



## Item no. 89589

EAN: 4043619895892 Country of origin: China Package: Retail Box

# **Technical details**

- Connector: 1 x SMA plug
- Frequency range:
  694 960 MHz
  - 1710 2700 MHz
- GSM, UMTS, Bluetooth, WLAN 2.4 GHz, ZigBee, DECT, Z-Wave, LoRa 868 MHz / 915 MHz
- Antenna gain: 2 dBi
- Impedance: 50 Ohm
- VSWR: 2.0 3.0
- Polarisation: linear, vertical
- Screw mounting with 12 mm bore hole
- Operating temperature: -10 °C ~ 55 °C
- Housing material: ABS
- Colour: black
- Protection class: IP67
- Cable: coaxial
- Cable type: RG-316U

## **DATASHEET**



- Cable colour: transparent
- Cable attenuation: 0.95 dB @ 1 GHz per meter
- Cable diameter: ca. 2.5 mm
- Cable length: ca. 3 m
- Dimensions (LxD): ca. 48 x 50 mm


## System requirements

• Device with a free SMA jack

# Package content

- Antenna
- Nut, washer

#### Images

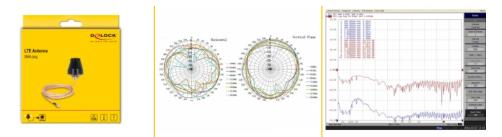

# **DATASHEET**



## General

| Mounting type:       | design mounting |
|----------------------|-----------------|
| Protection category: | IP67            |

#### Interface

| connector: |
|------------|
|------------|

# **Technical characteristics**

| Frequency range:       | 1710 - 2700 MHz<br>694 - 960 MHz |
|------------------------|----------------------------------|
| Antenna gain:          | 2 dBi                            |
| Impedance:             | 50 Ω                             |
| Operating temperature: | -10 °C ~ 55 °C                   |
| Polarisation:          | linear vertical                  |
| VSWR:                  | 2.0 - 3.0                        |

# **Physical characteristics**

| Housing material:  | ABS UV resistant          |
|--------------------|---------------------------|
| Cable category:    | coaxial                   |
| Cable type:        | RG-316U                   |
| Cable attenuation: | 0,95 dB @ 1 GHz pro Meter |
| Cable colour:      | transparent               |
| Cable length:      | 3 m (incl. connector)     |
| Diameter:          | 50 mm                     |
| Length:            | 48 mm                     |