


Delock PCI Express Card > 1 x internal USB 3.1 Gen 2 key B 20 pin female

Description

This PCI Express card by Delock expands the PC by one internal USB 3.1 key B 20 pin female port. Various cables can be connected to the card to provide up to two USB Type-A interfaces.

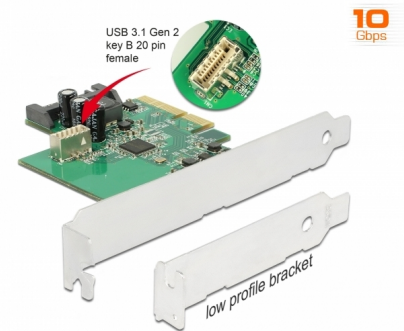

Item no. 89801

EAN: 4043619898015

Country of origin: Taiwan,
Republic of China

Package: Retail Box

Special features

- A data transfer rate of up to 10 Gbps per port is possible, due to the Asmedia chipset ASM2142. If two USB 3.1 devices are connected, they each support 10 Gbps.

Technical details

- Connectors:
 - internal:
 - 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) key B 20 pin female
 - 1 x SATA 15 pin power plug
 - 1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM2142
- Data transfer rate up to:
 - SuperSpeed USB 10 Gbps,
 - SuperSpeed USB 5 Gbps,
 - Hi-Speed 480 Mbps,
 - Full-Speed 12 Mbps,
 - Low-Speed 1.5 Mbps

- Power supply via PCI Express interface or via SATA 15 pin power connector
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Compliant with USB Attached SCSI Protocol (UASP) Rev. 1.0

System requirements

- Linux Kernel 4.4 or above
- Windows 8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot
- Optional: power supply with a free SATA power connector

Package content

- PCI Express card
- Low profile bracket
- User manual

Images



General

Specification:	USB 10 Gbps
Supported operating system:	Linux Kernel 4.4 or above Linux Kernel 4.9 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit

Interface

Internal:	1 x PCI Express x4, V3.0 1 x SATA 15 pin power plug 1 x USB 10 Gbps key B 20 pin female
-----------	---

Technical characteristics

Chipset:	Asmedia ASM2142
Data transfer rate:	10 Gbps

Physical characteristics

Slot bracket:	Low Profile standard
---------------	-------------------------