


Delock Adapter SMA jack to RP-SMA jack panel-mount 10 GHz

Description

This adapter by Delock is suitable for connecting components of radio frequency technology.

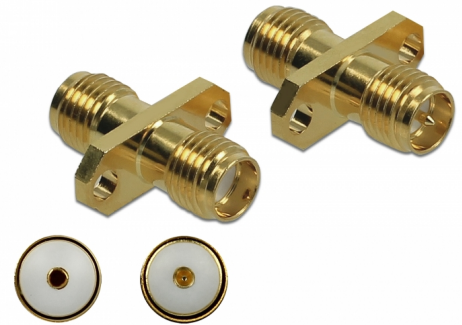

Item no. 89957

EAN: 4043619899579

Country of origin: Taiwan,
Republic of China

Package: Zip poly bag

Technical details

- Connectors:
 - 1 x SMA jack >
 - 1 x RP-SMA jack bulkhead
- Housing: brass gold plated
- Thread type: 1/4" - 36 UNS - 2A
- Frequency range: 10 GHz
- Impedance: 50 Ohm
- Operating temperature: -10 °C ~ 50 °C
- Dimensions (LxW): ca. 17.3 x 16.0 mm

System requirements

- Device with one free SMA or RP-SMA port

Package content

- Adapter

Interface

Connector 1:	1 x SMA jack
Connector 2:	1 x RP-SMA jack bulkhead

Technical characteristics

Frequency range:	10 GHz
Operating temperature:	-10 °C ~ 50 °C

Physical characteristics

Housing material:	brass gold plated
Length:	17.3 mm
Width:	16.0 mm
Thread type:	1/4" - 36 UNS - 2A