


# Delock PCI Express x8 Card to 2 x internal NVMe M.2 Key M - Low Profile Form Factor

## Description

This PCI Express card by Delock expands the PC by two **M.2** slots. Up to two M.2 SSDs in format 2280, 2260, 2242 and 2230 can be connected.

### Delock M.2 PCIe card for gaming and server

Especially in the gaming and server range, this card is ideally suited to expand the existing system by two fast M.2 **NVMe** slots. Both slots can be used simultaneously.

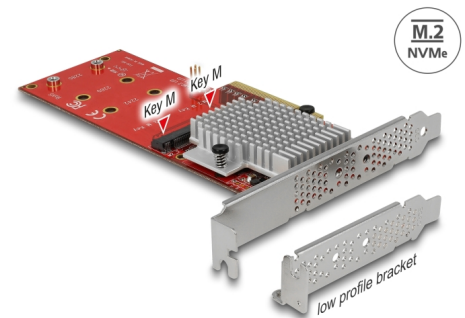

**Item no. 90305**

EAN: 4043619903054

Country of origin: Taiwan,  
Republic of China

Package: White Box

## Technical details

- Connectors:  
internal:  
2 x 67 pin M.2 key M slot  
1 x PCI Express x8, V3.0  
2 x 2 pin pin header for LED
- Chipset: Asmedia ASM2824
- Interface: PCIe
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Data transfer rate up to 32 Gbps
- Supports NVM Express (NVMe)
- Bootable

## System requirements

- Linux Kernel 3.17 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64/11
- PC with one free PCI Express x8 / x16 / x32 slot


---

## Package content

- PCI Express card
- Low profile bracket
- M.2 mounting material
- User manual

---

## Images

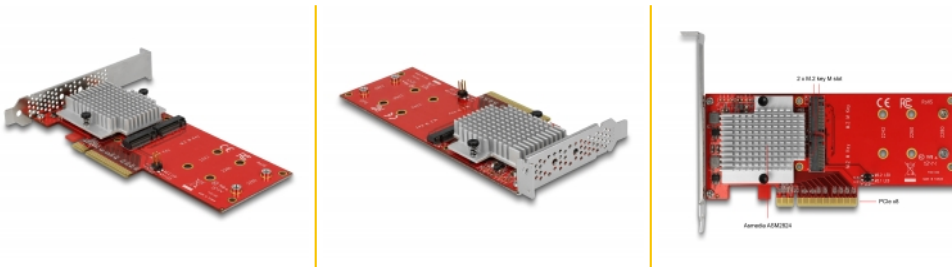

## General

Function:	NVM Express (NVMe) bootable
Supported operating system:	Linux Kernel 3.17 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
Slot:	PCIe
Supported module:	M.2 modules in format 2280, 2260 and 2242 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

## Interface

Internal:	2 x 67 pin M.2 key M slot 1 x PCI Express x8, V3.0
-----------	---

## Technical characteristics

Chipset:	Asmedia ASM2824
----------	-----------------

## Physical characteristics

Slot bracket:	standard Low Profile
---------------	-------------------------