


# Delock USB 3.0 PCI Express Card to 4 x external Type-A + 2 x internal Pin Header

## Description

This PCI Express card by Delock expands the PC by four external USB 3.0 ports as well as two internal USB 3.0 ports. Different USB devices, such as docking stations, card readers, external enclosures etc., can be connected to the card.

### Delock 8 Port USB 3.0 PCIe card

Up to four USB devices can be connected to the internal USB 3.0 pin header connectors simultaneously. Thus, together with the external ports, the card provides max. eight USB 3.0 ports.

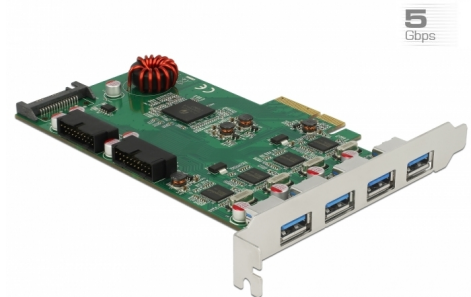

**Item no. 90306**

EAN: 4043619903061

Country of origin: China

Package: Retail Box

## Technical details

- Connectors:
  - external:
    - 4 x USB 3.0 Type-A female
  - internal:
    - 2 x 19 pin USB 3.0 pin header male
    - 1 x SATA 15 pin power connector
    - 1 x PCI Express x4, V2.0
- Chipset: Asmedia ASM1042A, Pericom PI7C9X2G608GP
- Data transfer rate up to:
  - SuperSpeed 5 Gbps,
  - Hi-Speed 480 Mbps,
  - Full-Speed 12 Mbps,
  - Low-Speed 1.5 Mbps
- Electrical power per port: max. 4.5 watt (5 V / 900 mA)

## System requirements

- Linux Kernel 3.17 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot
- Power supply with a free SATA power connector


---

## Package content

- PCI Express card USB 3.0
- Driver CD
- User manual

---

## Images



## General

|                             |  |
|-----------------------------|--|
| Supported operating system: | Linux Kernel 3.17 or above<br>Windows 10 32-Bit<br>Windows 10 64-Bit<br>Windows 7 32-Bit<br>Windows 7 64-Bit<br>Windows 8.1 32-Bit<br>Windows 8.1 64-Bit |
|-----------------------------|--|

## Interface

|              |                                       |
|--------------|---------------------------------------|
| Connector 1: | 4 x USB 5 Gbps Type-A female          |
| Connector 2: | 1 x SATA 15 pin plug                  |
| connector 3: | 1 x PCI Express x4, V2.0              |
| connector 4: | 2 x 19 pin USB 5 Gbps pin header male |

## Technical characteristics

|                     |  |
|---------------------|--|
| Chipset:            | Asmedia ASM1042A,<br>Pericom PI7C9X2G608GP |
| Data transfer rate: | up to 5 Gbps                               |

## Physical characteristics

|               |          |
|---------------|----------|
| Slot bracket: | standard |
|---------------|----------|