


Delock Mini PCIe I/O PCIe full size 2 x SATA 6 Gb/s

Description

This Mini PCIe module by Delock expands your system by two internal SATA 6 Gb/s interface. Thus, you can connect devices like e.g. SATA HDD, drives or similar.

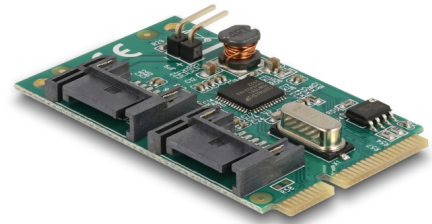

Item no. 95233

EAN: 4043619952335

Country of origin: China

Package: Retail Box

Technical details

- Connectors:
 - 1 x Mini PCIe male
 - 2 x SATA 6 Gb/s 7 pin plug
 - 1 x pin header for PWR LED for indication of hard drive accessing
- Chipset: Asmedia ASM1061
- Interface: PCI Express revision 2.0
- Data transfer rate:
 - SATA up to 6 Gb/s
 - PCI Express up to 5 Gb/s
- Supports hard drive with Native Command Queue (NCQ) feature
- Supports Serial ATA AHCI
- Supports SATA Port Multiplier

System requirements

- Linux Kernel 3.7 or above
- Windows Vista/Vista-64/7/7-64/8.1/8.1-64/10/10-64
- Motherboard with a free Mini PCIe slot with a PCIe interface

Package content

- Mini PCIe module
- Driver CD
- User manual

Images



General

Form factor:	Mini PCIe full size
Supported operating system:	Linux Kernel 3.7 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Vista 32-bit Windows Vista 64-bit

Interface

connector:	MiniPCIe based onPCIe
Connector 1:	2 x SATA 6 Gb/s 7 pin receptacle
Connector 2:	1 x pin header for PWR LED for indication of hard drive accessing

Technical characteristics

Chipset:	Asmedia ASM1061
Data transfer rate:	SATA up to 6 Gb/s PCI Express up to 5 Gb/s
Current consumption:	498 mA