


# Delock Mini PCIe I/O PCIe full size 2 x Gigabit LAN Low Profile

## Description

This Mini PCIe module by Delock expands a system by two Gigabit LAN interfaces, which can be lead out via the slot bracket.

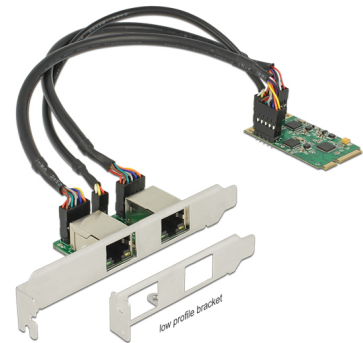

**Item no. 95258**

EAN: 4043619952588

Country of origin: China

Package: Retail Box

## Technical details

- Connectors:
  - 1 x Mini PCIe male >
  - 2 x Gigabit LAN RJ45 jack
- Chipset: ASM1182e, Realtek RTL8111E
- Form factor: Mini PCIe full size
- Interface: PCI Express revision 1.1
- Data transfer rate:
  - Ethernet up to 10 Mb/s
  - Fast Ethernet up to 100 Mb/s
  - Gigabit Ethernet up to 1000 Mb/s
  - PCI Express x1 up to 2.5 Gb/s
- Compatible with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab
- Supports IEEE 802.3x full duplex flow control
- Supports IEEE 802.1P layer 2 priority encoding
- Supports IEEE 802.1Q Virtual LAN (VLAN)
- Supports 9k Jumbo Frames
- Cable length with connectors: ca. 25 cm

---

## System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 2.6.x, Mac OS 10.10
- Mainboard with a free Mini PCIe slot with a PCIe interface

---

## Package content

- Mini PCIe module
- 3 connecting cable
- Slot bracket
- Low profile bracket
- Driver CD
- User manual

---

## Images



## General

Form factor:	Mini PCIe full size
Supported operating system:	Linux Kernel 2.6 or above Mac OS 10.5 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit

## Interface

connector:	2 x Gigabit LAN RJ45 jack
------------	---------------------------

## Technical characteristics

Chipset:	Realtek RTL8111E ASM1182e
Data transfer rate:	Ethernet up to 10 Mbps Fast Ethernet up to 100 Mbps Gigabit Ethernet up to 1 Gbps

## Physical characteristics

Slot bracket:	Low Profile standard
---------------	-------------------------