

Delock USB 2.0 Camera Module 5.04 mega pixel 91 ° V5 fix focus

Description

This USB 2.0 camera module by Delock offers in a compact construction a high resolution and low power consumption. It is ideally suited for installation in industrial components like IPCs, embedded systems, sensors and in device manufacture. The use of a photosensitive sensor with back side illumination (BSI) expands the scope of this module.



Item no. 96362

EAN: 4043619963621

Country of origin: China

Package:

Technical details

- Connector:
 - 1 x 5 pin USB 2.0 pin header female SMT, pitch 1.00 mm
- Resolution: 5.4 megapixel
- With optical IR filter
- Standard SCCB interface (I²C Bus)
- Output support for RAW RGB, RGB565/555/444, CCIR656, YUV422/420, YCbCr422 and compression
- Maximum resolution: QSXGA (2592 x 1944)
- Automatic image control functions including:
 - Automatic exposure control (AEC)
 - Automatic white balance (AWB)
 - Automatic band filter (ABF)
 - Automatic black-level calibration (ABLCL)
- Image quality controls including colour saturation, gamma, sharpness (edge enhancement), lens correction, white pixel canceling, noise canceling, and automatic 50 / 60 Hz luminance detection
- Supports scaling
- Power consumption:
 - Sensor suspend: 90 mA

- sensor active: 140 mA ± 5 mA @ 640 x 480 Pixel
 - Operating voltage: 5 V DC
 - Operating temperature: 5 °C ~ 50 °C
 - Operating humidity: ≤ 80 %
 - Sensor size: 1/4"
 - Sensitivity: 0.6 V / lx s
 - Signal-to-noise ratio (SNR): ca. 36 dB
 - Dynamic range: 69 dB
 - Fix focus: 0.3 m - infinite
 - Aperture: F/3.0
 - Frame rates:
 - 30 fps @ HVGA, VGA, XGA, 720p, QVGA
 - 15 fps @ UXGA, 1080p, QXGA
 - 7 fps @ 2592 x 1944
 - Dimensions (LxWxH): ca. 60 x 8 x 12 mm
-


System requirements

- PC with UVC support
 - Windows Vista/7/8.1/10
 - DirectX 9.0c or above
 - Linux Kernel 2.6.15 and above with Video4Linux
 - Minimum CPU P4 1.4 GHz, 512 MB RAM
-

Package content

- Camera Module
-

Images

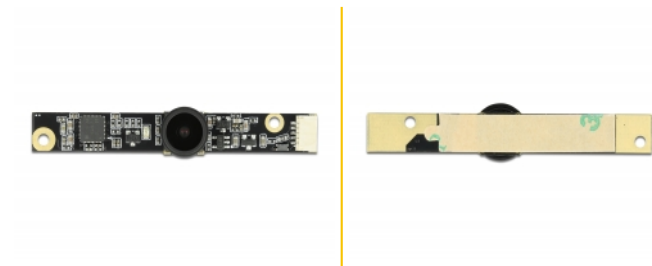

General

Supported operating system:	Linux Kernel 2.6.15 and above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Vista 32-bit Windows Vista 64-bit
Operating system requirement:	Windows DirectX from 9.0c Linux with Video4Linux

Interface

connector:	USB 2.0
------------	---------

Technical characteristics

Operating voltage:	5 V
Operating temperature:	5 °C ~ 50 °C
Maximum screen resolution:	2592 x 1944 @ 7 fps
Minimum screen resolution:	160 x 144 @ 30 fps
Sensor Size:	1/4"
Current consumption:	140 mA @ 640 x 480

Physical characteristics

Length:	60 mm
Width:	8 mm
Height:	13 mm