


P1

1000±30

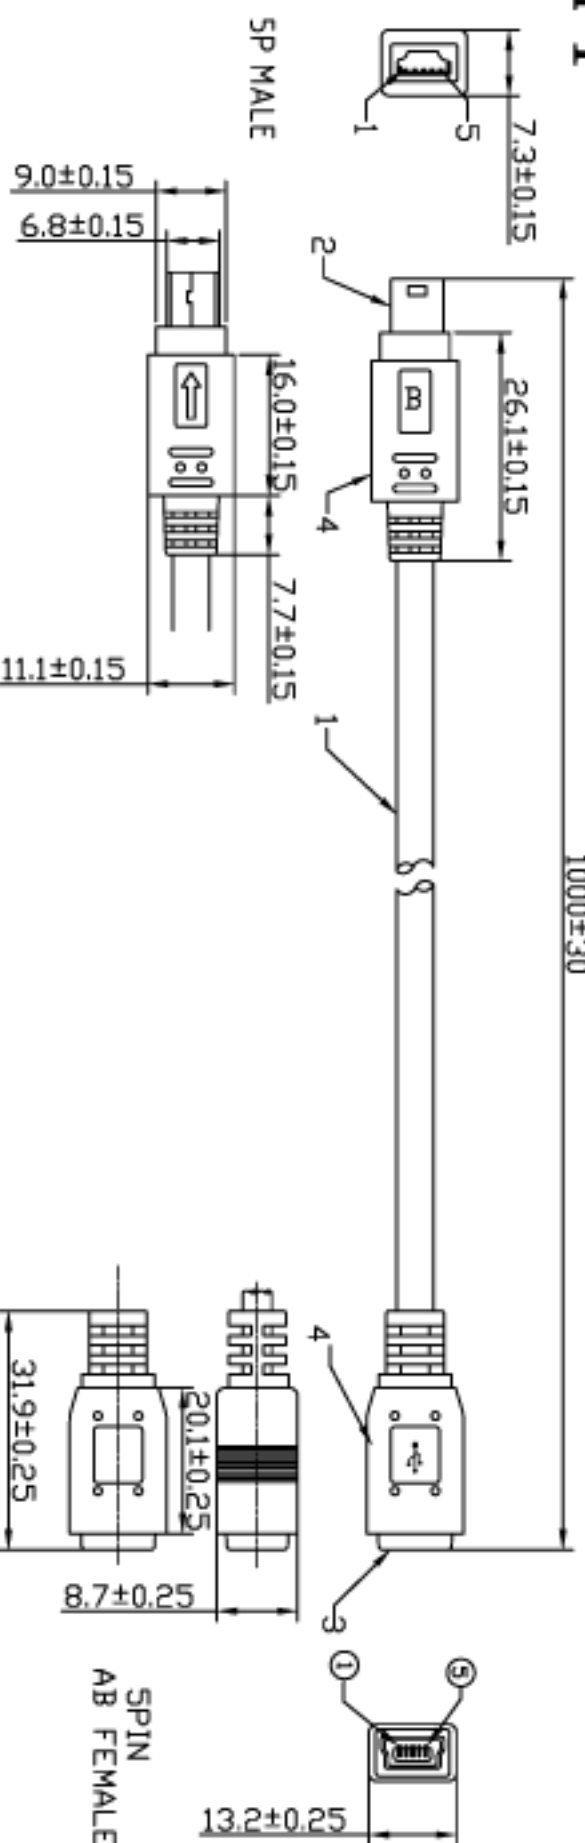

P2

## ELECTRICAL PROPERTIES:

1. 100% OPEN SHORT MIS-WIRE TEST
2. Contact Resistance: 10ohm
3. Insulation Resistance: 5Mega ohm
4. HI-Pot: 300V/10ms.

## Pin Assignment

P1	P2	COLOR
1	1	RED
2	2	WHITE
3	3	GREEN
5	5	BLACK
SHELL	SHELL	BRAID

4	P.V.C MOLDING SSP COLOR: BLACK	9
3	MINI USB SPIN AB TYPE FEMALE SHELL PLATEDNICKEL CONTACT:G/F	1
2	MINI USB SPIN B TYPE MALE SHELL PLATEDNICKEL CONTACT:G/F	1
1	CABLE: UL2725 28/1P+28#/2C+AEB REV 2.0 JACKET COLOR: BLACK OD: 3.5±0.1mm	6
NO.	DESCRIPTION	Q'TY UNITS

B		
REV.	DESCRIPTION	

10/05/10	DATE	
APPROVED	CHECKED	DRAWN
SIZE	FILE NAME:	PRODUCT NO.

UNLESS OTHERWISE SPECIFIED TOLERANCE	±0.5	±0.3	±0.2
ANG.	0°	45°	90°
SCALE:	NONE	UNIT: M/M	
DRAWN	Xing Fa	10/05/10	
CHECKED			
APPROVED			
SIZE	A4	REV. A	
FILE NAME:			

-82067