


Form-Factor	Standard PCIe
Input I/F	PCIe Gen 1, SATA III, USB 2.0
Output I/F	USB 2.0, SATA III(frontside), SATA II(backside mSATA)
Output Connector	2 x mSATA(Front and Back), 1 x M.2 (2242/2260/2280)
Max TDP	TBD
Dimension (WxLxH)	110 x 68.9 x 12.3mm.
Temperature	Operation: STD: 0°C ~ +70°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	www.delock.com

Please ensure that the pin assignment between USB and M.2 / mSATA, since the reverse connection capability exists.

	P7	P5	P3	P1
P10	P8	P6	P4	P2

M.2		mSATA	
P1	NC	P2	NC
P3	D0-	P4	GND
P5	D0+	P6	D1+
P7	GND	P8	D1-
		P10	NC

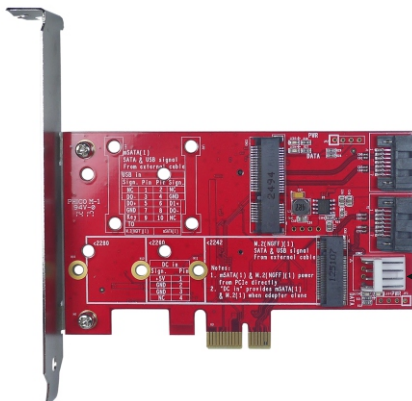

If you use this adapter without PCIe, the adapter needs the power over the **External Power In**. Do not connect the External Power In if the adapter is plugged into PCIe