

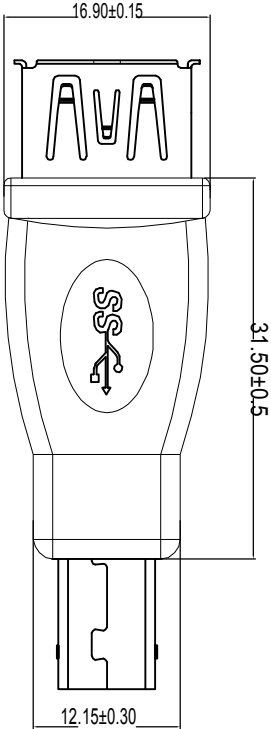

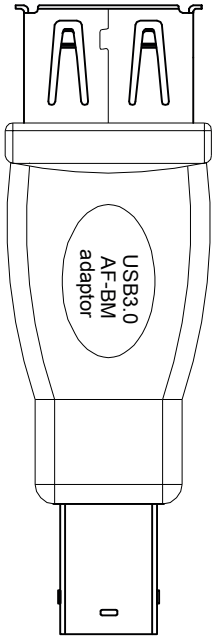


P2

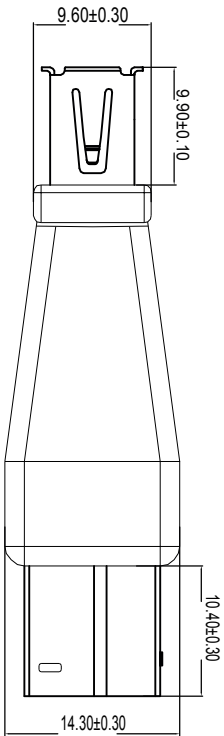

P1



PIN OUT			
P1		P2	
28AWG 1	—	1	1
28AWG 2	—	2	2
28AWG 3	—	3	3
28AWG 4	—	4	4
28AWG 5	—	8	8
28AWG 6	—	9	9
28AWG 7	—	7	7
28AWG 8	—	5	5
28AWG 9	—	6	6
SHELL	—	SHELL	

NOTES:
1.ELECTRICAL TEST:

- <1> .100% OPEN SHORT & MISS WIRE TEST.
- <2> .MAXIMUM CONDUCTOR RESISTANCE:5ohm
- <3> .MINIMUM INSULATION RESISTANCE: DC 300V 10Mohm

B	Model	BLACK PVC
B	Connector	USB3.0 B MALE,INSULATION BLUE,NICKEL PLATED SHELL
A	Connector	USB3.0 A FEMALE,INSULATION BLUE,NICKEL PLATED SHELL
NO.	ITEM	DESCRIPTION
		PILL OF MATEPIAL

Dat	2015 / 06 / 01	Title: Adapter USB 3.0-B male > USB 3.0-A femalee	
Unit	mm	Item no.	65179
Projection		Barcode	4043619651795
Rev	A	File No.	88192

