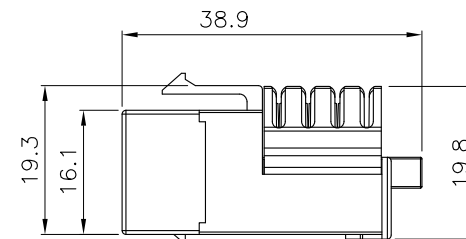

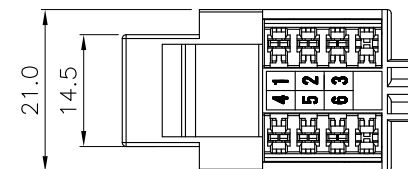


110/Krone Dual IDC

SCALE 1/1





Specification :

Material :

1. Plastic Housing : ABS, UL 94V-0.
2. RJ45 Jack Contact :
 - 2-1. Material : Phosphor Bronze with Nickel plated.
 - 2-2. Finish : 50 micro-inch Gold plated on Plug contact area.
3. IDC :
 - 3-1. Housing : PC+Glass Fiber, UL 94V-2.
 - 3-2. Terminal : Phosphor Bronze with Tin plated.
4. IDC Bracket : ABS, UL 94V-0.
5. PCB : FR4, UL 94V-0.

Performance :

- a. Insertion Force : 20N max. (IEC 60603-7-4)
- b. Retention Strength : 7.7 kg between Jack and Plug.
- d. Operating temperature : -40°C to 80°C. (ISO/IEC 11801, ANSI/TIA 568 C.2)
- d. Life(mating cycles) :
 - * IDC : Suitable for 22-26 AWG stranded and solid wire, compatible with both 110 & Krone punch down tools.

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING		22.APR.2013		QIQI		<div>DELOCK®</div> <div>we move the world</div>					
	CHECK		22.APR.2013		JANE							
	APPROVAL		22.APR.2013		JAIMY							
			DATE		NAME		ITEM NO.:					
	SCALE		1/1 (A4)		UNIT		mm		DES.:			
		DRAWING NO.) 	
		DRAWING CLASSIFICATION		S		SHEET		1 OF 1				

