




REV	ECRN	DATE
1	NEW PRODUCTION	201800630

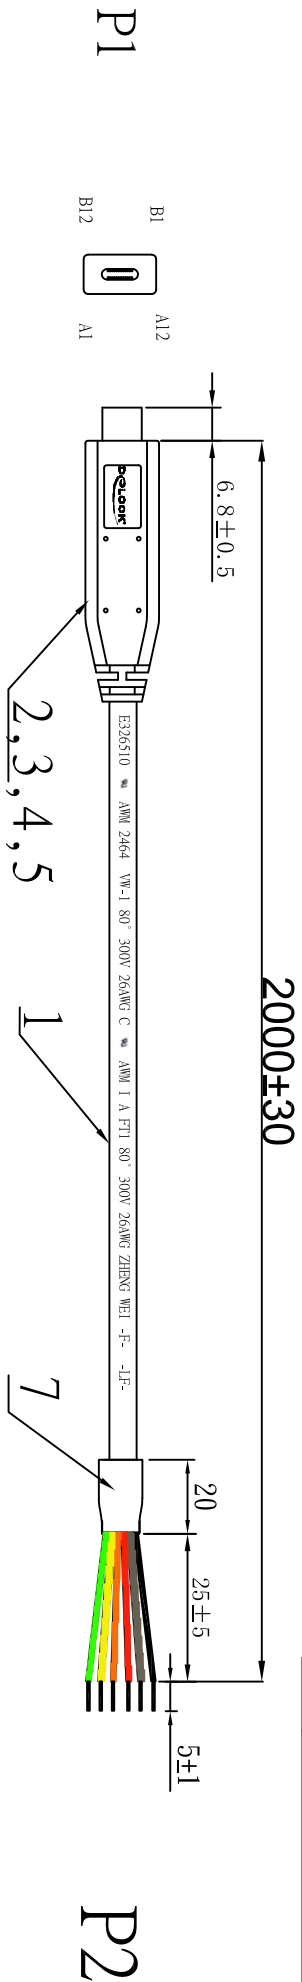

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MIS WIRE TEST.
2. CONTACT RESISTANCE: 0.5ohm,
3. INSULATOR RESISTANCE: 5M ohm.
4. HIGH VOLTAGE: DC 300V 0.01sec.
5. MUST BE ROHS COMPLIANT.

Packaging requirements

1. For each IPCS of wire binding according to the size of wire binding
2. Each case must be equipped with IPCS large waterproof bag:
3. The weight of each box must be within 10KG:
4. The actual number of containers shall prevail:
5. The quantity of each batch of containers shall be the same.

PIN WIRING

P1	P2
1 RED(5V)	(VCC)
2 ORANGE	(TXD)
3 YELLOW	(RXD)
4 GREEN	(RTS#)
5 BLACK	(GND)
6 BROWN	(CTS#)

⑧	I.180150.0301R	PE BAG	180*150*0.04MM PE BAG	1	PCS
⑦	F.0501B0.0100R	TUBE	Φ5.5*20mm HEAT TUBE COLOR BLACK	1	PCS
⑥	I1.000001.0400R	TIE	TIE BLACK L=70MM	1	PCS
⑤	C.045P01.0100R	MOLDING	PVC 45P BLACK	5.5	G
④	C.000000.0000R	MOLDING	PE	2.5	G
③	J.000008.0500R	TIN WIRE	TIN WIRE OD:0.8MM	3.5	G
②	B.01004M.0N05R	CONNECTOR	TTL-RS232-PCB(5V) TYPE C/M CONNECTOR PLASTIC: WHITE	1	PCS
①	A.009X01.0603R	CABLE	UL2464 26AWG(7/0.16TC)*6C(RED,ORANGE, GREEN BLACK, YELLOW, BROWN)+AL FOIL PVC JACKET COLOR: BLACK OD=5.0±0.1mm L=2000MM	1	PCS
NO.	PART NO	ITEM	DESCRIPTION	Q'TY	UNIT

DLOCK® we move the world		
Title: Converter USB Type-C™ 2.0 male to TTL 6 open wire 2.0 m		
Date	2018 / 07 / 03	
Unit	mm	
Item no.		63949
Projection		4043619639496
Rev	A	88203