

# Delock Antenna 5G LTE con SMA maschio -3,3 - 1,3 dBi omnidirezionale con giunto inclinabile nero

## Descrizione

Questa antenna 5G LTE Delock consente l'uso di varie bande 5G LTE all'interno. È completamente compatibile con GSM, UMTS, 5G LTE, ZigBee, Z-Wave, NB-IoT, WLAN a 2,4 GHz, Bluetooth, ISM, DECT e LoRa.

### Standard radio mobile 5G

5G, a differenza dei suoi predecessori LTE (4G) e UMTS (3G) utilizzerà un numero sempre maggiore di frequenze.

Lo standard 5G promette più throughput, capacità e bassa latenza.



### Articolo n. 12634

EAN: 4043619126347

Paese di origine: Taiwan,  
Republic of China

Pacchetto: Retail Box

## Dettagli tecnici

- Connettore: 1 x SMA maschio
- GSM, UMTS, 5G LTE, ZigBee, Z-Wave, NB-IoT, WLAN, Bluetooth, ISM, DECT, LoRa
- Gamma di frequenza:
  - 617 - 798 MHz
  - 803 - 960 MHz
  - 1452 - 1496 MHz
  - 1710 - 2270 MHz
  - 2300 - 2690 MHz
  - 3300 - 3800 MHz
  - 4200 - 5000 MHz
- Guadagno antenna: -3,3 - 1,3 dBi
- Impedenza: 50 Ohm
- VSWR: 3,0 - 6,0
- Polarizzazione: lineare, verticale
- Temperatura di esercizio: -10 °C ~ 55 °C
- Materiale custodia: ABS
- Colore: nero
- Dimensioni (LxPxA): ca. 183,06 x 21,50 x 13,50 mm










## Requisiti di sistema

- Dispositivo con un connettore SMA disponibile

## Contenuto della confezione

- Antenna

## Immagini

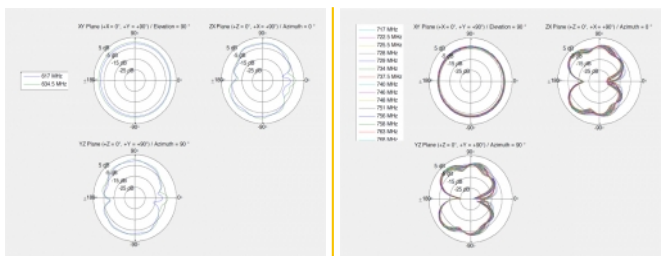

## General

Mounting type:	Screw mounting
Suitable for indoor:	Si

## Interface

connector:	1 x SMA maschio
------------	-----------------

## Technical characteristics

Frequency range:	617 - 798 MHz 803 - 960 MHz 1452 - 1496 MHz 1710 - 2270 MHz 2300 - 2690 MHz 3300 - 3800 MHz 4200 - 5000 MHz
Antenna gain:	-3.3 - 1.3
Impedance:	50 Ω
Temperatura di esercizio:	-10 °C ~ 55 °C
Polarisation:	linear vertical
VSWR:	3,0 - 6,0

## Physical characteristics

Custodia colore:	nero
Materiale custodia:	ABS
Width:	2.15 cm
Height:	1.35 cm
Length with tilt joint:	18.39 cm