

# Delock Slim Bay Mobile Rack for 2 x 2.5" U.2 NVMe SSD with 5.25" frame

## Description

This **solid metal mobile rack** by Delock can be installed into a free 5.25" bay of a PC by the help of the included frame. Furthermore, it is also possible to use the mobile rack directly in a server rack or 19" storage enclosure.

### Quick change of SSD

Due to the special mechanism, the SSD can be **exchanged quickly and easily**. For example, data backups can be taken and stored in a safe place.

### Tray with key lock and springs

The mobile rack is equipped with a **key lock** to prevent unauthorised access. The stable carrier of metal has springs on the top and bottom which **reduce vibrations**.



**Item no. 47011**

EAN: 4043619470112

Country of origin: China

Package: Box

## Technical details

- Connectors:
  - internal:
    - 2 x SFF-8639 female
  - external:
    - 2 x SFF-8643 female
    - 1 x SATA 15 pin plug
    - 1 x 3 pin pin header for fan
- Suitable for 2.5" U.2 NVMe SSD:
  - HDD height up to 15 mm
- Data transfer rate up to 32 Gbps
- Interface: PCIe Rev. 3.0
- Key lock
- 4 x LED indicator
- Dimensions (LxWxH): ca. 140 x 72 x 40 mm
- Dimensions 5.25" frame (LxWxH): ca. 145 x 140 x 42 mm


## System requirements

- Linux Kernel 5.4 or above
- Windows 8.1/8.1-64/10/10-64/11
- Windows Server 2019
- PC with one free 5.25" bay
- Two free U.2 ports
- Power supply with a free SATA power connector

## Package content

- Mobile Rack
- 2 x 2.5" mobile rack inner tray
- 1 x 5.25" frame
- 2 x keys
- Screws
- User manual

## Images

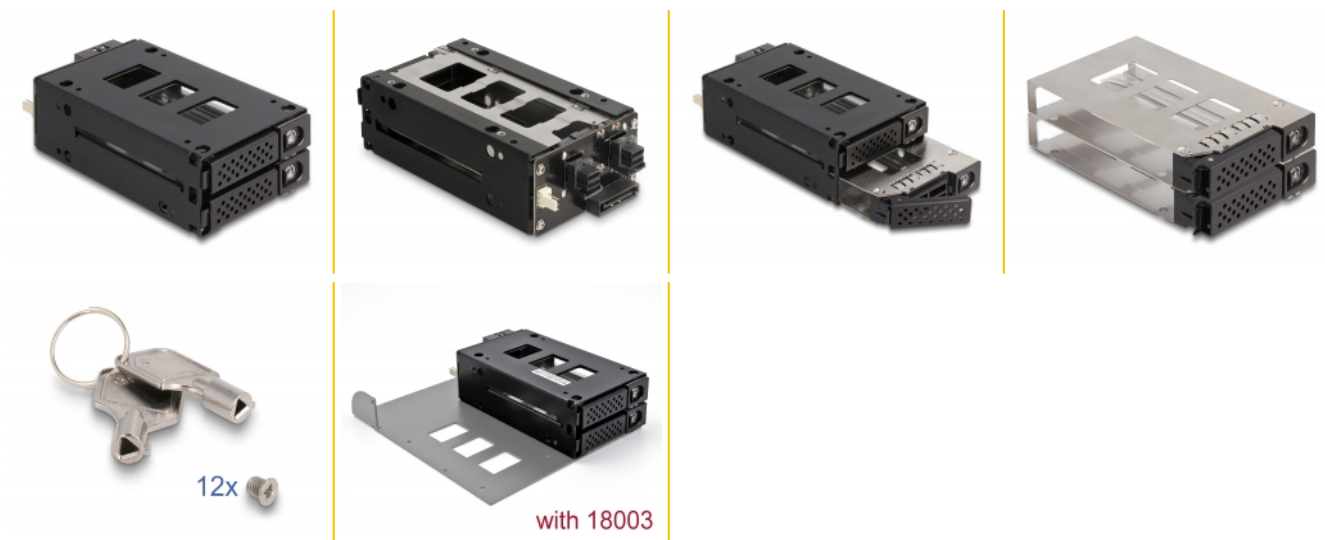

## General

Suitable for data medium:	height up to 15.0 mm
Supported operating system:	Linux Kernel 5.4 or above Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Server 2019 Windows 11

## Interface

External:	1 x 15 Pin SATA Stromanschluss 2 x SFF-8643 female 1 x 3 pin pin header for fan
Internal:	2 x U.2 SFF-8639 female

## Technical characteristics

Data transfer rate:	32 Gbps
---------------------	---------