


# Delock M12 Connector A-coded 3 pin male for mounting with screw connection 90° angled metal

## Description

This connector by Delock can be used to connect a cable via a screw terminal connection with an M12 connector, e.g. for machine control or automation.

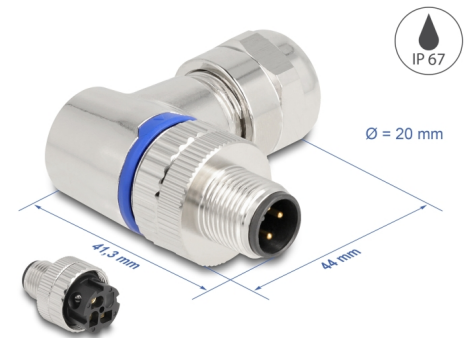

**Item no. 60539**

EAN: 4043619605392

Country of origin: China

Package: Zip poly bag

## Technical details

- Connectors:
  - 1 x M12 male A-coded 3 pin
  - 3 x screw terminal
- Housing material: metal
- Useable for a cable gauge range from 26 to 20 AWG (0.13 - 0.52 mm<sup>2</sup>)
- Operating voltage: max. 250 V
- Current: max. 4 A
- Operating temperature: -25 °C ~ 85 °C
- Protection class: IP67
- Cable entry max. 3.0 - 8 mm
- Thread size: M12 x 1.0 mm
- Colour: black
- Dimensions (LxWxD): ca. 44.0 x 41.3 x 20.0 mm

## System requirements

- A free M12 female port

---

## Package content

- Connector

---

## Images



### Interface

|              |              |
|--------------|--------------|
| Connector 1: | 1 x M12 plug |
|--------------|--------------|

### Technical characteristics

|                        |                |
|------------------------|----------------|
| Operating voltage:     | 250 V          |
| Operating temperature: | -25 °C ~ 85 °C |
| Current consumption:   | 4 A            |

### Physical characteristics

|                   |             |
|-------------------|-------------|
| Housing material: | metal       |
| Pin finishing:    | gold-plated |
| Diameter:         | 20 mm       |
| Length:           | 44 mm       |
| Width:            | 41.3 mm     |
| Colour:           | silver      |