


# Delock Adapter USB 2.0 Tip-A muški > 1 x serijski RS-232 DB9 muški s vijcima i maticama ESD zaštite

## Opis

Ovaj USB 2.0 na RS-232 prilagodnik tvrtke Delock omogućava prilagodljivo DB9 spajanje odgovarajućim vijcima i maticama za rad na serijskim upravljačima, pisačima, mjernim instrumentima, IoT uređajima, itd. Ugrađena ESD zaštita sprječava uništavanje elektroničkih komponenti.

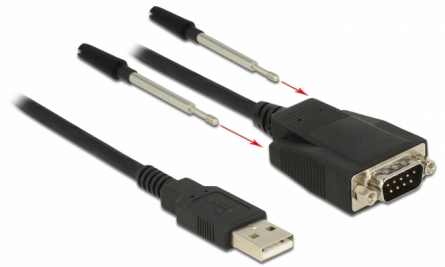

45 cm

### Predmet br. 62958

EAN: 4043619629589

Zemlja podrijetla: China

Pakiranje: Retail Box

## Tehnički podaci

- Priključak:
  - 1 x USB 2.0 Tip-A muški
  - 1 x serijska muška RS-232 DB9
- Skup čipova: FTDI FT232RL
- Serijski spojnik s vijcima ili maticama
- Vrsta vijka: #4-40 UNC
- Kompatibilan s USB 3.0, USB 2.0, i USB 1.1 full speed 12 Mbps
- Brzina prijenosa podataka do 115,2 Kbps
- Signali: TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND
- Paritet parni, neparni, nijedan, oznaka, prazno mjesto
- Stop bit: 1, 1,5, 2
- Podatkovni bit: 5, 6, 7, 8
- Kontrola protoka: nema, Xon/Xoff, RTS/CTS
- FIFO: 128 bajta - TX
- FIFO: 256 Bajta - RX
- ESD zaštita:
  - ±15 KV ESD model ljudskog tijela (HBM)
  - ±15 KV IEC1000-4-2 praznina za pražnjenje
  - ±8 KV IEC1000-4-2 kontaktno pražnjenje

- Struja potrošnje: oko 150 mA
- Duljina kabela: oko 35 cm
- Duljina kabela zajedno s priključkom: oko 45 cm
- Radna temperatura: 0 °C ~ 60 °C
- Vlažnost: 5 ~ 95 %



## Preduvjeti sustava

- Windows 7/7-64/8.1/8.1-64/10/10-64/11, Linux ex Kernel 2.6
- Osobno ili prijenosno računalo sa slobodnim USB Tipa-A priključkom

## Sadržaj pakiranja

- USB 2.0 na 1 x serijski adapter
- 2 x vijka
- CD s upravljačkim programom
- Korisnički priručnik

## Slike



## General

Funkcija:	Plug & Play
Tehnički podaci:	RS-232 (EIA / TIA) USB 1.1 USB 2.0
Supported operating system:	Linux Kernel 2.6 ili noviji Windows 10 32-bit Windows 10 64-bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows 11

## Interface

Priključak 1:	1 x USB 2.0 Tipa-A muški
Priključak 2:	1 x serijska muška RS-232 DB9

## Technical characteristics

Skup čipova:	FTDI FT232RL
Brzina prijenosa podataka:	up to 115,2 Kb/s
FIFO:	128 byte 256 Byte
Radna temperatura:	0 °C ~ 60 °C
Humidity:	5 ~ 95 %
Signal transmission:	TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND
Data transmission:	asynchronous full duplex
Current consumption:	< 150 mA

## Physical characteristics

Duljina kabela:	35 cm
-----------------	-------

Cable length incl. connector:	45 cm
Vrsta vijka:	#4-40 UNC
Boja:	crne
Overvoltage protection:	±15 kV ESD model ljudskog tijela (HBM) ±15 kV EN / IEC 61000-4-2 praznina za pražnjenje ±8 kV EN / IEC 61000-4-2 kontaktno pražnjenje