


# Delock RJ45 2 x female to 2 x Terminal Block with push-button for DIN rail angled

## Description

This adapter by Delock can be used to connect various network devices. Strands with stripped ends can be connected via the terminal block toolfree.

### DIN rail mounting

With the clips included in the delivery content, the adapter can be attached to a 15 mm or 35 mm wide DIN rail.

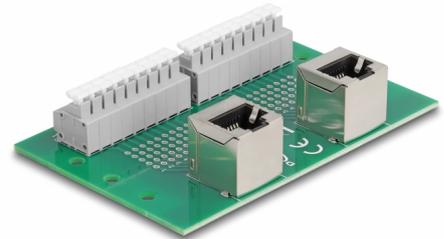

**Item no. 66995**

EAN: 4043619669950

Country of origin: China

Package: Box

## Technical details

- Connectors:
  - 2 x RJ45 female angled
  - 2 x 9 pin terminal block
- Pin assignment: 1:1
- Pitch: 3.81 mm
- Useable for a cable gauge from 24 to 12 AWG
- DIN rail mounting: 15 mm and 35 mm
- Operating temperature: -40 °C ~ 100 °C
- Dimensions (LxWxH): ca. 91 x 60 x 18 mm


## System requirements

- Two free RJ45 male
- 15 mm or 35 mm DIN rail

## Package content

- Adapter
- 2 x DIN rail clip
- 5 x screws

## Images



## General

Mounting type:	DIN rail mounting: 15 mm and 35 mm
----------------	------------------------------------

## Interface

Connector 1:	2 x RJ45 female angled
Connector 2:	2 x 9 pin terminal block

## Technical characteristics

Operating temperature:	-40 °C ~ 100 °C
------------------------	-----------------

## Physical characteristics

Pitch distance:	3.81 mm
Conductor gauge:	24 to 12 AWG
Length:	91 mm
Width:	60 mm
Height:	18 mm