


Delock PoweredUSB cable male 12 V to DC 5.5 x 2.1 mm male angled 3 m

Description

This PoweredUSB cable by Delock can be used to supply power to a device with DC 5.5 x 2.1 mm female port via a PC or hub with PoweredUSB 12 V port.

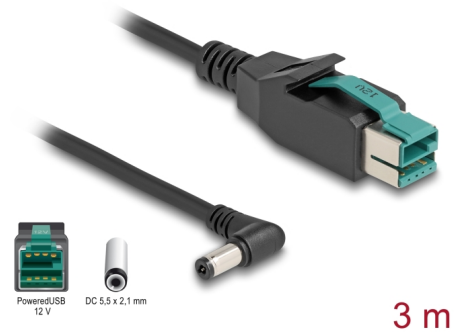

Item no. 80013

EAN: 4043619800131

Country of origin: China

Package: Zip poly bag

Technical details

- Connectors:
 - 1 x PoweredUSB male 12 V
 - 1 x DC 5.5 x 2.1 mm male angled
- PoweredUSB specification
- Voltage: 12 V
- Cable gauge: 20 AWG
- Cable diameter: ca. 4.2 mm
- Cable double shielded
- Cable jacket material: PVC
- Colour: black
- Length incl. connectors: ca. 3 m

Package content

- PoweredUSB cable

Images



PoweredUSB
12 V



DC 5,5 x 2,1 mm

General

| | |
|----------------|------------|
| Specification: | PoweredUSB |
|----------------|------------|

Interface

| | |
|--------------|--------------------------|
| Connector 1: | 1 x PoweredUSB male 12 V |
| Connector 2: | 1 x DC 5.5 x 2.1 mm male |

Technical characteristics

| | |
|----------|------|
| Voltage: | 12 V |
|----------|------|

Physical characteristics

| | |
|------------------------|--------|
| Conductor gauge: | 20 AWG |
| Shielding: | double |
| Length: | 3 m |
| Colour: | black |
| Cable diameter: | 4.2 mm |
| Cable jacket material: | PVC |