

# Delock USB 10 Gbps Extension Cable USB Type-C™ male to female PD 3.0 100 W 0.5 m grey metal

## Description


This USB cable by Delock allows the extension of a USB Type-C™ connection.

### USB Power Delivery (USB PD 3.0) support up to 100 watt

Supports the USB Power Delivery 3.0 standard, which allows connected devices to be powered with up to 100 W (20 V / 5 A).

### Metal housing and strain relief

Thanks to the elegant metal housing and sturdy strain relief on both sides, the cable is optimally protected against damage in everyday use.

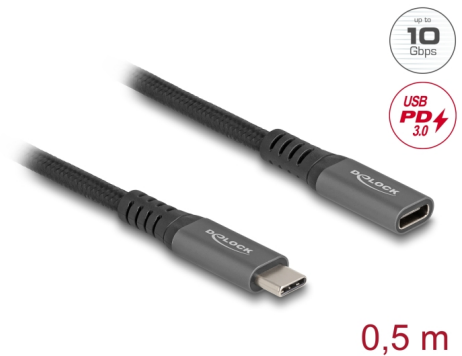

**Item no. 80021**

EAN: 4043619800216

Country of origin: China

Package: Zip poly bag

## Technical details

- Connectors:
  - 1 x USB 10 Gbps USB Type-C™ male
  - 1 x USB 10 Gbps USB Type-C™ female
- Connector with metal housing
- Cable with textile shielding
- Cable gauge:
  - 32 AWG data line
  - 22 AWG power line
- Cable diameter: ca. 5 mm
- Contacts gold-plated
- Cable triple shielded
- Data transfer rate up to 10 Gbps
- Display resolution up to 3840 x 2160 @ 60 Hz  
(depending on the system and the connected hardware)
- Supports HDR10
- Supports HDCP 1.4 and 2.3
- Supports PCI Express 3.0 protocol (4 lanes)
- Supports DisplayPort 1.4a protocol

- Supports DisplayPort Alt Mode 2.0
- Dual channel, bi-directional data transfer
- USB Power Delivery (USB PD 3.0) support up to 100 watt (20 V / 5 A)
- Colour: black / grey
- Length incl. connectors: ca. 0.5 m

---

## Package content

- USB cable

---

## Images



## General

Cable finishing:	textile coating
Specification:	HDCP 1.4 USB 10 Gbps DisplayPort 1.4 HDR10 PCI Express 3.0 HDCP 2.3 USB Power Delivery 3.0

## Interface

Connector 1:	1 x USB Type-C™ male
Connector 2:	1 x USB Type-C™ female

## Technical characteristics

Data transfer rate:	10 Gbps
Maximum screen resolution:	3840 x 2160 @ 60 Hz

## Physical characteristics

Housing material:	Aluminium
Pin finishing:	gold-plated
Conductor gauge:	32 AWG data line 22 AWG power line
Shielding:	triple
Length:	50 cm
Colour:	black / grey
Cable diameter:	5 mm