


# Delock PCI Express x4 Kartica na 1 x interni USB 3.2 Gen 2 ključ A 20-pinski ženski

## Opis

Ova PCI Express kartica tvrtke Delock proširuje računalo pomoću internog USB 3.2 ključa A 20-pinski ženski ulaz. Razni kabeli mogu se spojiti na karticu kako bi se omogućilo ili jedno USB Type-C™ ili jedno USB Tip-A sučelje.

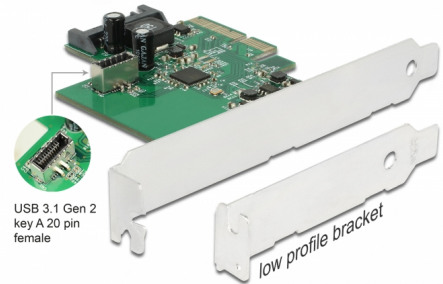

## Predmet br. 89029

EAN: 4043619890293

Zemlja podrijetla: Taiwan,  
Republic of China

Pakiranje: Retail Box

## Tehnički podaci

- Priključak:  
unutarjni:  
1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) ključ A 20-pinski ženski  
1 x SATA 15-polni kabel napajanja muški  
1 x PCI Express x4, V3.0
- Skup čipova: Asmedia ASM3142
- Brzina prijenosa podataka do:  
SuperSpeed USB 10 Gbps,  
SuperSpeed USB 5 Gbps,  
Hi-Speed 480 Mbps,  
Full-Speed 12 Mbps,  
Low-Speed 1,5 Mbps
- Izvor napajanja putem PCI Express sučelja ili putem SATA 15-polnog konektora napajanja
- Podržava eXtensible Host Controller Interface (xHCI) specifikacije 1.1
- Sukladno protokolu USB Attached SCSI (UASP) ver. 1.0

---

## Preduvjeti sustava

- Linux Kernel 4.4 ili noviji
- Windows 8.1/8.1-64/10/10-64
- Računalo s jednim slobodnim PCI Express x4 / x8 / x16 / x32 utorom
- Dodatno: izvor napajanja sa slobodnim SATA priključkom za napajanje


---

## Sadržaj pakiranja

- PCI Express kartica
- Nosač niskog profila
- Korisnički priručnik

---

## Slike



## General

Tehnički podaci:	USB 10 Gbps
Supported operating system:	Linux Kernel 4.4 ili noviji Windows 10 32-bit Windows 10 64-bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit

## Interface

Unutarnji:	1 x PCI Express x4, V3.0 1 x USB 10 Gbps ključ A 20-pinski ženski 1 x SATA 15-polni kabel napajanja muški
------------	---

## Technical characteristics

Skup čipova:	Asmedia ASM3142
Brzina prijenosa podataka:	10 Gbps

## Physical characteristics

Slot bracket:	niskoprofilni standard
---------------	---------------------------