


# Delock PCI Express x1 Card to 6 x Serial

## Description

The Delock PCI Express card expands your PC by six external serial ports. You can connect devices like scanner, printer, mouse etc. to the card.

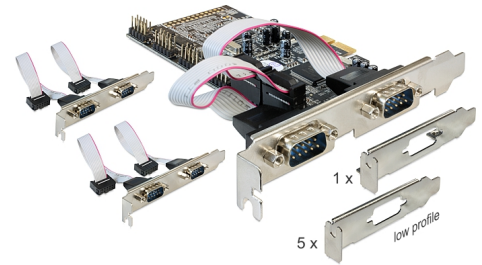

**Item no. 89347**

EAN: 4043619893478

Country of origin: China

Package: Blister

## Technical details

- Connector:
  - external:
    - 2 x serial RS-232 DB9 male
    - 2 x serial RS-232 DB9 male (separate rear bracket)
    - 2 x serial RS-232 DB9 male (separate rear bracket)
  - internal:
    - 1 x PCI Express x1, V1.1
- Chipset: Moschip
- Data transfer rate up to 230.4 Kb/s
- FIFO: 256 byte
- Compatible with 16C550 UART

## System requirements

- Windows Server-2003/Server-2003-64/Vista/Vista-64/7/7-64/8/8-64/8.1/8.1-64/10/10-64/11, Linux Kernel 2.6
- PC with one free PCI Express slot and two rear slot

## Package content

- PCI Express card
- 2 x rear bracket
- 6 x low profile bracket
- Driver CD
- User manual

---

## Images



### General

Form factor:	Low Profile
Specification:	RS-232 (EIA / TIA) PCIe 1.1
Supported operating system:	Linux Kernel 2.6 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Server 2003 32-bit Windows Server 2003 64-bit Windows Vista 32-bit Windows Vista 64-bit
Slot:	PCIe

### Interface

External:	6 x Serial RS-232 DB9 Plug
Internal:	1 x PCI Express x1, V1.1

### Technical characteristics

Chipset:	ASIX MCS9922 ASIX MCS9901
Data transfer rate:	6 x up to 230,4 Kbps
FIFO:	6 x 256 Byte
UART:	16C450 / 16C550 / 16C650

### Physical characteristics

Slot bracket:	Low Profile standard
---------------	-------------------------

Colour:

black

