


Delock PCI Express kartica > 1 x 10 Gigabit LAN NBASE-T RJ45

Opis

Ova Delock PCI Express kartica pruža mrežni priključak s brzinom prijenosa do 10 Gbps pomoću konvencionalnih bakrenih kabela kat. 6 ili kat. 6A. Uz NBASE-T tehnologiju, dostupne su dodatne brzine od 2,5 Gbps i 5 Gbps. To omogućuje brzine prijenosa veće od 1 Gbps, kad veza od 10 Gbps nije moguća uz postojeći kabel.

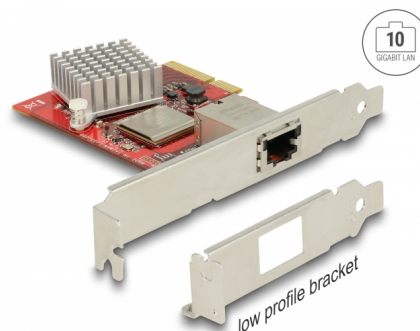

Predmet br. 89456

EAN: 4043619894567

Zemlja podrijetla: Taiwan,
Republic of China

Pakiranje: Retail Box

Tehnički podaci

- Priključak:
vanjski: 1 x 10 Gigabit LAN RJ45 ženski
unutarnji: 1 x PCI Express x4, V2.0
- Skup čipova: Tehuti TN4010
- Brzina prijenosa podataka:
Fast Ethernet do 100 Mbps
Gigabit Ethernet do 1 Gbps
NBASE-T (nacrt) s brzinom do 2,5 Gbps i 5 Gbps
10 Gigabit Ethernet do 10 Gbps
PCI Express x4 do 16 Gbps
- Podržava 16k Jumbo okvire
- Podržava IEEE 802.1Q virtualni LAN (VLAN)
- Podržava IEEE 802.3ad pridruživanje veza

Preduvjeti sustava

- Windows Server-2008 R2/Server-2012/Server-2012 R2/7/7-64/8.1/8.1-64/10/10-64,


Linux ex Kernel 2.6.24

- Računalo s jednim slobodnim PCI Express x4 / x8 / x16 / x32 utorom

Sadržaj pakiranja

- PCI Express kartica
- Nosač niskog profila
- CD s upravljačkim programom
- Korisnički priručnik

Slike

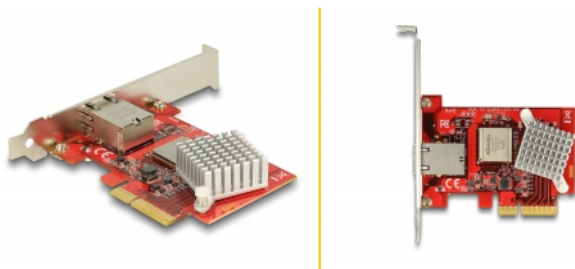

General

Supported operating system:	Linux Kernel 2.6.24 Windows 10 32-bit Windows 10 64-bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Server 2008 R2 Windows Server 2012 R2 Windows Server 2012
-----------------------------	--

Interface

Vanjski:	1 x 10 Gigabit LAN RJ45 jack
Unutarnji:	1 x PCI Express x4, V2.0

Technical characteristics

Skup čipova:	Tehuti TN4010
Brzina prijenosa podataka:	Fast Ethernet up to 100 Mbps Gigabit Ethernet up to 1 Gbps NBASE-T (Draft) with up to 2,5 Gbps and 5 Gbps Gigabit Ethernet do 10 Gbps

Physical characteristics

Slot bracket:	niskoprofilni standard
---------------	---------------------------