

# Delock PCI Express 4.0 x16 Card to 4 x SFF-8639 NVMe - Bifurcation - Low Profile Form Factor

## Description

This PCI Express card by Delock expands the PC by **four SFF-8639 interfaces**. SSDs with e.g. U.2 interface can be connected to these ports.

### PCIe Bifurcation

The card requires the PCIe bifurcation of the motherboard to split the PCIe signal in order to use multiple ports.

### Note

Without PCIe bifurcation only the first SFF-8639 port of the card can be used.



**Item no. 90077**

EAN: 4043619900770

Country of origin: China

Package: Box

## Technical details

- Connectors:  
PCIe card:  
1 x PCI Express x16, V4.0  
2 x SFF-8654 8i female  
Connection cables:  
1 x SFF-8654 8i male  
1 x Molex 4 pin power plug >  
2 x SFF-8639 female
- Data transfer rate up to 64 Gbps
- Supports NVM Express (NVMe)
- Bootable, ex UEFI version 2.3.1
- Supports S.M.A.R.T.
- Supports TRIM
- 4 x LED indicator
- Humidity: 15 ~ 90 %
- Operating temperature: 5 °C ~ 50 °C
- Storage temperature: -25 °C ~ 70 °C


## System requirements

- Linux Kernel 4.6.4 or above
- Windows Server 2016
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express x16 / x32 slot

## Package content

- PCI Express card
- Low profile bracket
- 2 x Cable SFF-8654 8i male to 2 x SFF-8639 receptacle, length ca. 80 cm
- User manual

## Images

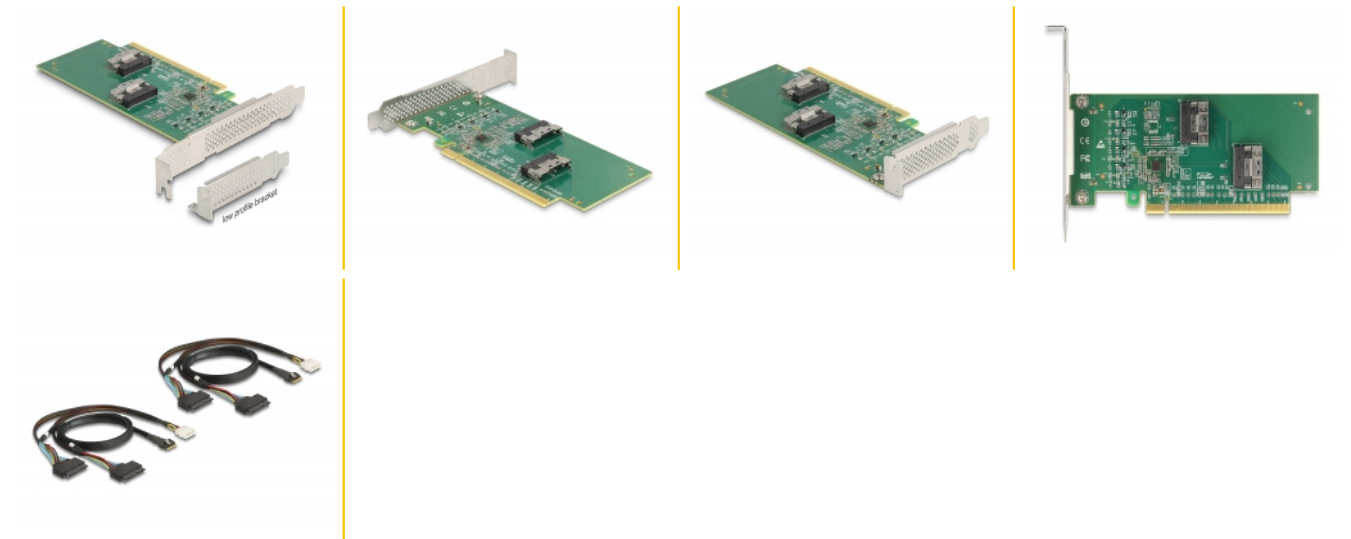

## General

Function:	Bootable, ex UEFI 2.3.1
Supported operating system:	Linux Kernel 4.6.4 or above Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Server 2016
LED indicator:	4 x

## Interface

Connector 1:	1 x PCI Express x16, V4.0
Connector 2:	4 x SFF-8639 female
connector 3:	2 x Molex 4 pin power plug