


# Delock 2 port SATA PCI Express x1 Card with RAID

## Description

This PCI Express card by Delock expands the PC by two internal SATA ports. Different devices such as SSDs, hard drives, DVD-drives etc. can be connected to the card.

### RAID

When using more than one SATA port, there is the possibility to use different RAID modes.

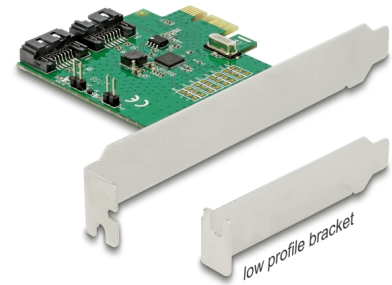

**Item no. 90392**

EAN: 4043619903924

Country of origin: China

Package: Retail Box

## Technical details

- Connectors:
  - 2 x SATA 6 Gb/s 7 pin plug
  - 1 x PCI Express x1, V2.0
  - 2 x 2 pin pin header for LED
- Chipset: Asmedia ASM1061R
- Supports RAID 0, 1, SPAN
- Supports Native Command Queuing (NCQ)
- Supports S.M.A.R.T.
- Supports TRIM
- Supports DevSleep
- Hot Swap
- Bootable

## System requirements

- Linux Kernel 3.3 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64/11
- PC with one free PCI Express slot


---

## Package content

- PCI Express card
- Low profile bracket
- LED cable
- Driver CD
- User manual

---

## Images



## General

|                             |                                                                                                                                                                       |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Supported operating system: | Linux Kernel 3.3 or above<br>Windows 10 32-Bit<br>Windows 10 64-Bit<br>Windows 7 32-Bit<br>Windows 7 64-Bit<br>Windows 8.1 32-Bit<br>Windows 8.1 64-Bit<br>Windows 11 |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Interface

|           |                                                        |
|-----------|--------------------------------------------------------|
| Internal: | 1 x PCI Express x1, V2.0<br>2 x SATA 6 Gb/s 7 pin plug |
|-----------|--------------------------------------------------------|

## Technical characteristics

|                |                  |
|----------------|------------------|
| Chipset:       | Asmedia ASM1061R |
| RAID function: | SPAN<br>0<br>1   |

## Physical characteristics

|               |                         |
|---------------|-------------------------|
| Slot bracket: | Low Profile<br>standard |
|---------------|-------------------------|