


Delock PCI Express x4 Card to 4 x external SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) USB Type-A female

Description

The PCI Express card by Delock expands a PC by **four external USB 3.2 ports**. Different USB devices, such as docking stations, card readers, external enclosures etc., can be connected to the card. The card allows a data transfer rate of 10 Gbps on all ports when used simultaneously.

Power supply

The PCIe card can be supplied with power via the PCIe connector. If this is not sufficient, the card has a SATA power connector. At each USB port the **maximum output is 2 A**, all ports together have an output of maximum 8 A.

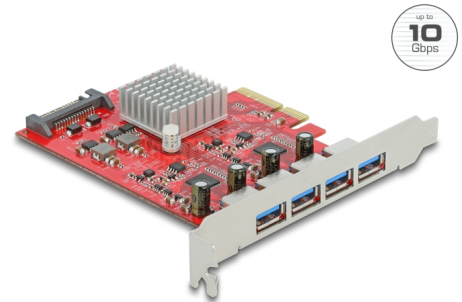

Item no. 90481

EAN: 4043619904815

Country of origin: Taiwan, Republic of China

Package: Retail Box

Technical details

- Connectors:
 - external:
 - 4 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) Type-A female
 - internal:
 - 1 x SATA 15 pin power connector
 - 1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM3142, ASM2806
- Data transfer rate up to:
 - SuperSpeed USB 10 Gbps,
 - SuperSpeed USB 5 Gbps,
 - Hi-Speed 480 Mbps,
 - Full-Speed 12 Mbps,
 - Low-Speed 1.5 Mbps
- Downwards compatible to USB 3.0, USB 2.0, USB 1.1
- Power supply via PCI Express interface or via SATA 15 pin power connector
- Electrical power per port: max. 10 watt (5 V / 2 A)

- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
-


System requirements

- Linux Kernel 3.18.37 or above
 - Windows 8.1/8.1-64/10/10-64/11
 - PC with one free PCI Express x4 / x8 / x16 / x32 slot
-

Package content

- PCI Express card SuperSpeed USB 10 Gbps
 - User manual
-

Images

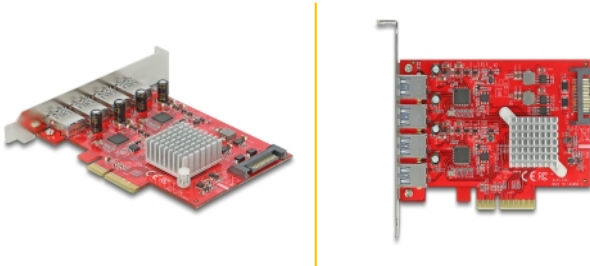

General

Supported operating system:	Linux Kernel 3.18.37 or above Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
-----------------------------	---

Interface

External:	4 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) Type-A female
Internal:	1 x PCI Express x4, V3.0 1 x SATA 15 pin power connector

Technical characteristics

Chipset:	Asmedia ASM3142
----------	-----------------

Physical characteristics

Slot bracket:	standard
---------------	----------