


Delock PCI Express x16 Card to 1 x M.2 Key B + 1 x NVMe M.2 Key M + 1 x mSATA - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by **two M.2 slots** as well as **an mSATA slot**. One M.2 SATA module can be connected in format 2280, 2260, 2242, 2230 with this card and connected via SATA cable to the motherboard. Furthermore, one **M.2 NVMe / PCIe module** in format 2280, 2260, 2242, 2230 can be connected. Additionally, one **mSATA memory** can be connected via SATA cable to the motherboard. All slots can be used separate or at the same time.

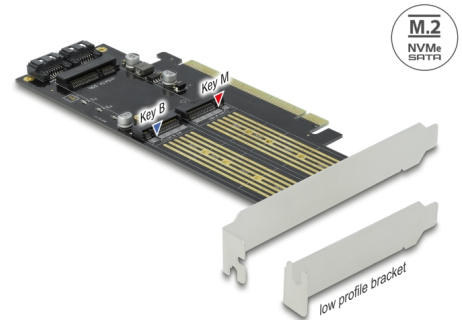

Item no. 90486

EAN: 4043619904860

Country of origin: China

Package: Retail Box

Technical details

- Connectors:
 - 1 x 67 pin M.2 key B slot
 - 1 x 67 pin M.2 key M slot
 - 1 x mSATA slot (full size)
 - 1 x PCI Express x16, V4.0
 - 2 x SATA 6 Gb/s 7 pin plug
- Interface: PCIe / SATA
- Supports one M.2 module in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA and one M.2 module in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- 3 x LED indicator
- Bootable
- Supports NVM Express (NVMe)
- Supports Native Command Queuing (NCQ)
- Supports S.M.A.R.T.

- Supports TRIM
- Supports DevSleep
- Hot Swap




System requirements

- Linux Kernel 4.6.4 or above
- Windows 8.1/8.1-64/10/10-64
- PC with one free PCI Express x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- 2 x SATA cable, length ca. 35 cm
- Mounting material
- Screwdriver
- 2 x thermal pad
- User manual

Images



General

Function:	NVM Express (NVMe) bootable
Supported operating system:	Linux Kernel 4.6.4 or above Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
Slot:	PCIe SATA
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

Interface

Internal:	1 x 67 pin M.2 key B slot 1 x 67 pin M.2 key M slot 2 x SATA 6 Gb/s 7 pin plug 1 x PCI Express x16, V4.0
-----------	-------------------------------------------------------------------------------------------------------------------