


Delock Converter USB 2.0 male > TTL 6 pin pin header female 1.8 m (5 V)

Description

This USB TTL converter by Delock is due to its wide temperature range most suitable for industrial applications. It supports virtual COM ports and enables optional a direct access to the interface. The converter is multifunctional compatible to the standard systems Windows, Linux and MAC. It is suitable for Embedded systems, control systems, Field Programmable Gate Array, MCUs, dongles etc.

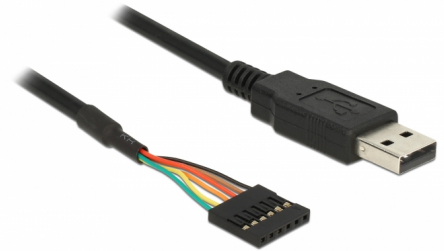

1,8 m

Item no. 83784

EAN: 4043619837847

Country of origin: China

Package: Retail Box

Technical details

- Connector: USB 2.0 type A male > TTL 6 pin pin header
- Pin assignment:
 1. GND
 2. CTS
 3. VCC
 4. TXD
 5. RXD
 6. RTS
- Chipset: FTDI 232RL
- Cable gauge: 26 AWG
- Temperature range: -20°C to +80°C
- No-load current: 70 uA
- Converter: 5 V / 15 mA (VCC, GND)
- Compatible to UHCI / OHCI / EHCI controller
- TTL 5 V (data) / 4 mA or HighLevel 12 mA
- Data rate up to 3 Megabaud
- Databit: 7 or 8
- Stoppbits: 1 or 2
- Parity: Parity: none, space, even, odd, mark

- Flow control: software XON / XOFF or hardware RTS / CTS
- FIFO: 128 Byte – RX
256 Byte – TX
- VCC = 5 V
- Cable length: ca. 1.80 m

System requirements

- Windows XP/XP-64/Vista/Vista-64/7/7-64/8.1/8.1-64/10/10-64/11, Windows CE 4.2, 5.0, 6.0, Mac OS 10.5, 10.6, Mac OS ex 10.9, Linux ex Kernel 2.6
- PC or laptop with a free USB type A port


Package content

- USB TTL cable
- Driver CD
- User manual

Images



ca. 1,8 m



General

Function:	Plug & Play
Specification:	TTL/CMOS
Supported operating system:	Linux Kernel 2.6 or above Mac OS 10.5 or above Mac OS 10.6 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows 11

Interface

Connector 1:	1 x USB 2.0 Type-A male
Connector 2:	1 x 6 pin pin header pitch: 2,54 mm

Technical characteristics

Chipset:	FTDI 232R
Data transfer rate:	300 bps - 3 Mbps
FIFO:	256 Byte 128 byte
Operating temperature:	-20 °C ~ 80 °C
Voltage:	VCC = 5 V

Physical characteristics

Cable length:	1.8 m
Conductor gauge:	26 AWG
Colour:	black