


# Delock Module MiniPCIe I/O PCIe full size 4 x Serial RS-232 with Voltage supply

## Description

This MiniPCIe adapter by Delock expands your system by four additional serial ports, which you can lead out through the slot bracket. You can connect different serial devices like printer, scanner, modem etc. to this adapter.

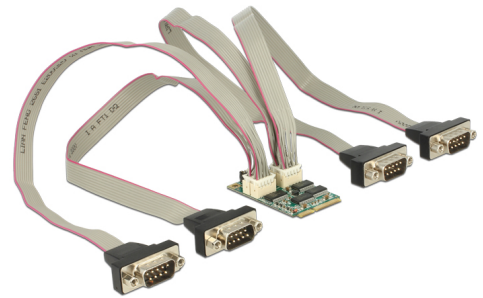

**Item no. 95244**

EAN: 4043619952441

Country of origin: Taiwan,  
Republic of China

Package: Box

## Technical details

- Connector:
  - on the module:
    - 4 x 10 pin pin header male
  - on the slot bracket (standard) 2 x:
    - 2 x serial RS-232 DB9 male with screw nuts
  - or on the slot bracket (low profile) 4 x:
    - 1 x serial RS-232 DB9 male with screw nuts
- Chipset: Exar XR17V354
- Form factor: MiniPCIe full size
- Interface: PCI Express version 2.0
- Data transfer rate up to 921.6 Kb/s
- Selectable voltage supply 5 V / 12 V or RI
- Compatible with 16C550 UART
- Datenbits: 5, 6, 7, 8
- Signals: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND, 5V/12V/RI
- Operating Temperature: -30 ~ 75°C
- Storage Temperature: -40 ~ 85
- Cable length: ca. 30 cm (incl. connector)

- Relative humidity: 0 - 95 % (non condensing)
- Cable length incl. connectors: ca. 30 cm

---

## System requirements

- Windows Vista/Vista-64/7/7-64/8/8-64/8.1/8.1-64/10/10-64/11, Linux Kernel 2.6
- Mainboard with a free MiniPCIe slot with a PCIe interface


---

## Package content

- MiniPCIe module
- 4 x serial connection cable (pin header > DB9)
- Power cable
- 2 x standard slot bracket with two DB9 ports
- 4 x low profile slot bracket with one DB9 port
- Driver CD
- User manual

---

## Images

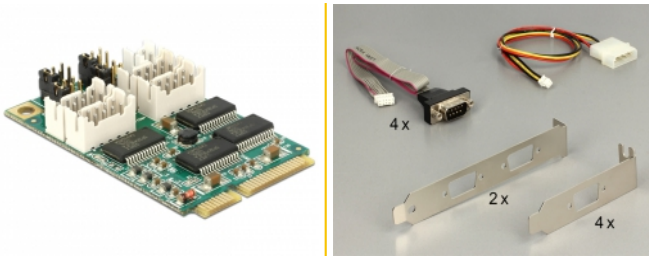

## General

Form factor:	Mini PCIe full size
Supported operating system:	Linux Kernel 2.6 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows 11
Protection:	ESD (Electrostatic Discharge)

## Interface

Connector 1:	1 x Mini PCI Express, Rev. 2.0
Connector 2:	4 x 10 Pin RS-232 pin header
connector 3:	1 x 4 pin power connector

## Technical characteristics

Chipset:	Exar 17V354
Data transfer rate:	4 x up to 921,6 Kbps
FIFO:	4 x 265 Byte
Operating temperature:	-30 °C ~ 75 °C
Humidity:	5 ~ 95 %
Interface output:	RS-232
Data transmission:	asynchronous full duplex
Voltage:	Power over System (POS) 5 V oder 12 V Spannung individuell für jeden Port durch Jumper einstellbar (Pin 9)
UART:	16C550
Data bits:	5, 6, 7, 8

## Physical characteristics

Cable length incl. connector:	30 cm
-------------------------------	-------