


Delock LTE MIMO antena 2 x N ženski 8 dBi usmjerni sa spojnim kabelom RG-402 37 cm vanjska bež

Opis

Ova Delock antena omogućuje vam uporabu različitih LTE opsega na otvorenim i u zatvorenim prostorima. U potpunosti je usklađena za GSM, UMTS, LTE, ZigBee, DECT, Z-Wave, NB-IoT, WLAN, Bluetooth, ISM, MIMO i LoRa 868 MHz / 915 MHz.

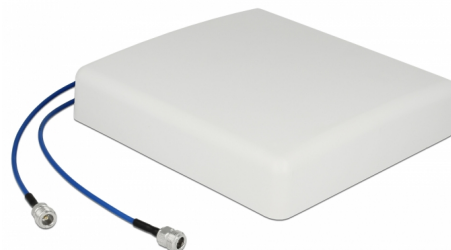

Predmet br. 88931

EAN: 4043619889310

Zemlja podrijetla: China

Pakiranje: Kutija

Tehnički podaci

- Priključak: 2 x N ženski
- GSM, UMTS, LTE, ZigBee, DECT, Z-Wave, NB-IoT, WLAN, Bluetooth, ISM, LoRa 868 MHz / 915 MHz, MIMO
- Frekvencijski opseg:
698 - 960 MHz
1710 - 2700 MHz
- Pojačanje antene: 8 dBi
- Impedancija: 50 ohma
- VSWR: 1,5
- Polarizacija: vertikalna, vodoravni
- HBW horizontalna širina snopa: 75°
- VBW vertikalna širina snopa: 65°
- Vrsta kabela: RG-402
- Duljina kabela zajedno s priključkom: oko 37 cm
- Radna temperatura: -40 °C ~ 65 °C
- Materijal kućišta: ABS
- Težina: oko 0,9 kg
- Mjere (DxŠxV): oko 23,7 x 22,9 x 5,0 cm
- Promjer šipke: otpr. 5,5 cm



Preduvjeti sustava

- Uređaj s dva slobodna N spojnika

Sadržaj pakiranja


- Antena
- Montažni materijal: matica, podloška, montažni nosač i nosač za montažu na šipku

Slike

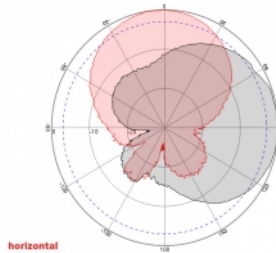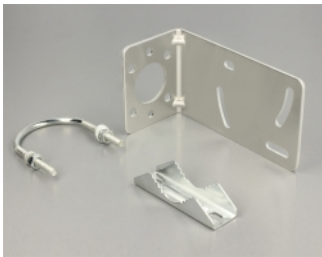


horizontal

698MHz

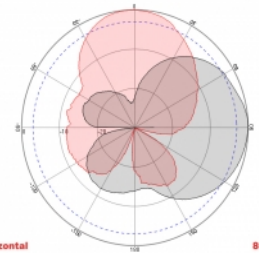


horizontal

800MHz




horizontal

960MHz




horizontal

1710MHz




horizontal

1800MHz

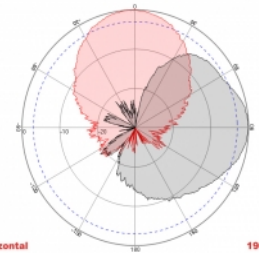


horizontal

1900MHz




horizontal

2000MHz




horizontal

2100MHz




horizontal

2200MHz




horizontal

2300MHz

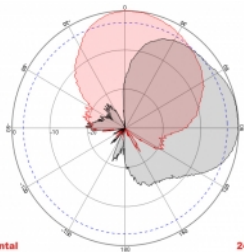


horizontal

2400MHz




horizontal

2500MHz




vertical

698MHz




vertical

800MHz




vertical

960MHz




vertical

1710MHz




vertical

1800MHz

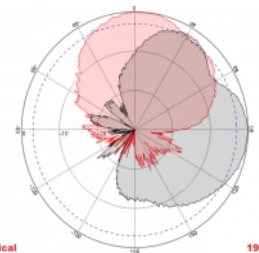


vertical

1900MHz




vertical

2000MHz




vertical

2100MHz




vertical

2200MHz

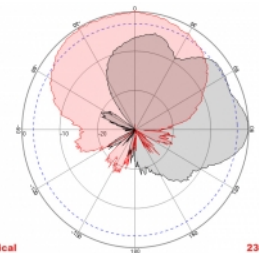

vertical

2300MHz

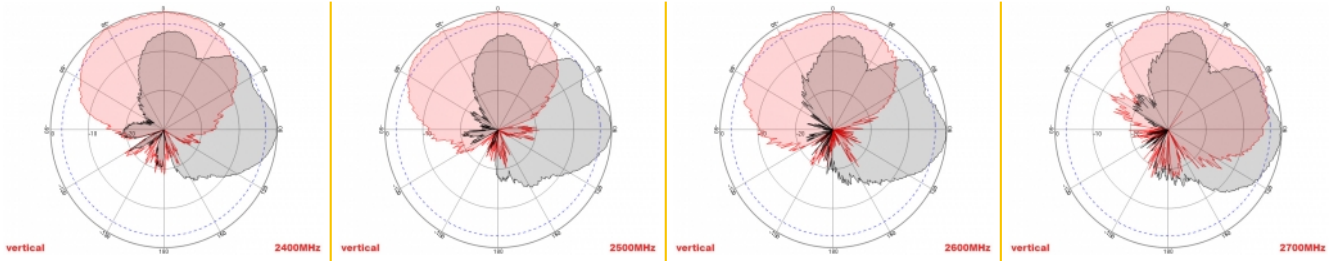

General

Mounting type:	pole wall
Suitable for indoor:	Yes (Da)
Suitable for outdoor:	Yes (Da)

Technical characteristics

Frequency range:	1710 - 2700 MHz 698 MHz - 960 MHz
Antenna gain:	8 dBi
Beam width horizontal:	75°
Beam width vertical:	65°
Impedancijaa:	50 Ω
Radna temperatura:	-40 °C ~ 60 °C
Polarisation:	vertikal horizontal
Power handling:	50 W
VSWR:	1,5

Physical characteristics

Antenna type:	directional
Materijal kućišta:	ABS
Weight:	0.9 kg
Cable type:	RG-141
Cable attenuation:	0.43 dB @ 1,0 GHz per meter
Boja kabela:	plava
Cable length incl. connector:	37 cm
Duljina:	23,7 cm

Width:	22,9 cm
Height:	5,0 cm
Boja:	bijela