


Delock PCI Express x2 Kartica 1 x RJ45 10 Gigabit LAN AQC113CS

Opis

Ova Delock PCI Express kartica pruža mrežni priključak s brzinom prijenosa do 10 Gbps pomoću konvencionalnih bakrenih kabela kat. 6 ili kat. 6A. Uz NBASE-T tehnologiju, dostupne su dodatne brzine od 2,5 Gbps i 5 Gbps. To omogućuje brzine prijenosa veće od 1 Gbps, kad veza od 10 Gbps nije moguća uz postojeći kabel.

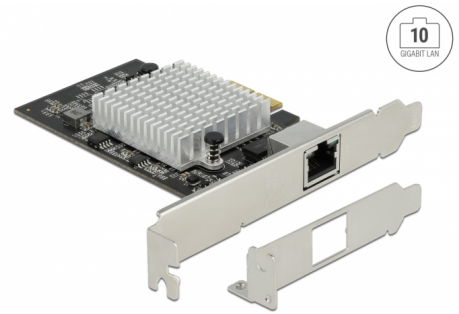

Predmet br. 89528

EAN: 4043619895281

Zemlja podrijetla: China

Pakiranje: Kutija

Tehnički podaci

- Priključak:
 - vanjski: 1 x 10 Gigabit LAN RJ45 ženski
 - unutarnji: 1 x PCI Express x2, V3.0
- Skup čipova: Marvell AQC113CS
- Brzina prijenosa podataka:
 - Ethernet do 10 Mbps
 - Fast Ethernet do 100 Mbps
 - Gigabit Ethernet do 1 Gbps
 - NBASE-T s brzinom do 2,5 Gbps i 5 Gbps
 - 10 Gigabit Ethernet do 10 Gbps
 - PCI Express x2 do 16 Gbps
- Podržava IEEE 802.3az (energetski efikasan Ethernet)
- Podržava 16k Jumbo okvire
- Podržava IEEE 802.1Q virtualni LAN (VLAN)
- Podržava PXE
- LED indikator povezivanja i šupljine


Preduvjeti sustava

- Linux Kernel 3.10 ili noviji
- Windows 8.1/8.1-64/10/10-64
- Računalo s jednim slobodnim PCI Express x2 / x4 / x8 / x16 / x32 utorom

Sadržaj pakiranja

- PCI Express kartica
- Nosač niskog profila
- CD s upravljačkim programom
- Korisnički priručnik

Slike



General

Supported operating system:	Linux Kernel 5.8.0 or above Windows 10 32-bit Windows 10 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit
-----------------------------	---

Interface

Vanjski:	1 x 10 Gigabit LAN RJ45 jack
Unutarnji:	1 x PCI Express x2, V3.0

Technical characteristics

Skup čipova:	Aquantia AQC113CS
Brzina prijenosa podataka:	Ethernet up to 10 Mbps Fast Ethernet up to 100 Mbps Gigabit Ethernet up to 1 Gbps NBASE-T (Draft) with up to 2,5 Gbps and 5 Gbps Gigabit Ethernet do 10 Gbps

Physical characteristics

Slot bracket:	standard niskoprofilni
---------------	---------------------------